

8" COMPACT FLUORESCENT RECESS, NON DIMMING

8" COMPACT FLUORESCENT RECESS, NON DIMMING

DP-842N-2HA

8" New construction, Non-IC, Non Dimmable, Horizontal Housing
For 2 lamp of 42 or 32 or 26 watts

PLC 42 or 32 W - Triple Twin, GX24q base, 4 Pin
PLC 26 W - Quad, G24q base, 4 Pin

DP-826N-2HA


8" New construction, Non-IC, Non Dimmable, Horizontal Housing
For 2 lamp of 26 watts

DP-842N-1HA

8" New construction, Non-IC, Non Dimmable, Horizontal Housing
For 1 lamp of 42 or 32 or 26 watts

DP-818N-2HA

8" New construction, Non-IC, Non Dimmable, Horizontal Housing
For 2 lamp of 18 watts, Quad, G24q 4 Pin

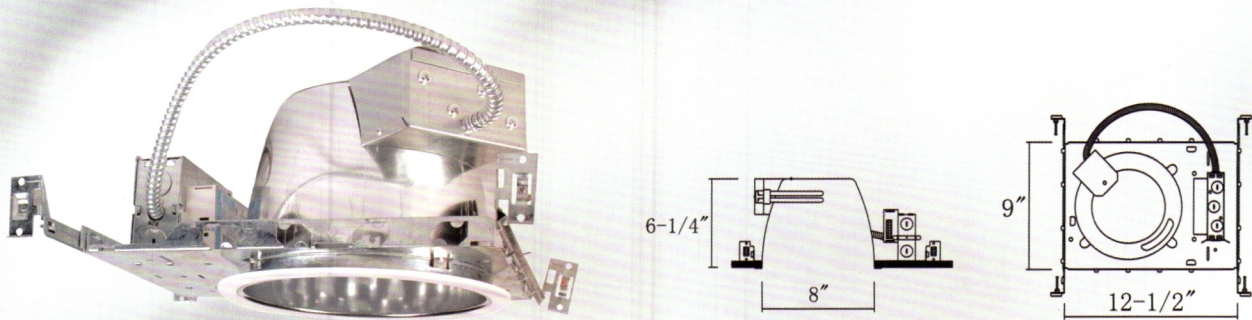

For non-insulated ceiling or for insulated ceiling but insulation must be kept 3" from housing on all sides.

Housing Features

Galvanized steel construction.

The reflector can be removed to access to the ballast.

Junction Box

Listed for through branch circuit wiring

Contains seven 7/8" knockouts and four Romex plyouts with strain relief.

Access to junction box and ballast from below ceiling is by removing reflector

Bar Hanger

Pre-installed Real nail easily installs in regular lumber, engineered lumber

Bar hangers are adjustable from 13-5/8" to 25" and can be repositioned 90 degree on plaster frame

Electronic Ballast

Thermally protected, fused, HPF electronic ballast provides full light output and rated lamp life.

Non Dimming, Universal voltage 120 - 277 VAC input.

Listings

CUL Listed for Damp Location

CUL Listed for Feed Through

Energy Star Qualified

8" COMPACT FLUORESCENT RECESS, NON DIMMING

DP-842R-1HA

8" Remodel, Non-IC, Non Dimmable, Horizontal Housing
For 1 lamp of 42 or 32 or 26 watts

PLC 42 or 32 W - Triple Twin, GX24q base, 4 Pin

PLC 26 W - Quad, G24q base, 4 Pin



DP-826R-2HA

8" Remodel, Non-IC, Non Dimmable, Horizontal Housing
For 2 lamp of 26 watts

PLC 26 W - Quad, G24q base, 4 Pin

DP-818R-2HA

8" Remodel, Non-IC, Non Dimmable, Horizontal Housing
For 2 lamps of 18 watts, Quad, G24q 4 Pin.



For Non IC housings, Insulation must be kept 3" from all sides of the housings
It can be installed from below the ceiling.

Housing Features

Single wall aluminum housing

Junction Box

Listed for through branch circuit wiring

Contains seven 7/8" knockouts and four Romex pryouts with strain relief.

Remodel Clips

Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials.

Electronic Ballast

Thermally protected, fused, HPF electronic ballast provides full light output and rated lamp life.

Non Dimming, Universal voltage 120 - 277 VAC input.

Listings

CUL Listed for Damp Location

CUL Listed for Feed Through

Energy Start Qualified

Meets State of California Title 24 requirements

8" COMPACT FLUORESCENT RECESS, NON DIMMING

Trims : For 8" Non Dimming Housings


DPT-801W-HA

White Baffle, Clear Hazy reflector, White Ring



DPT-805C-HA

Clear Hazy Reflector, White Ring

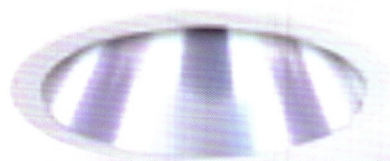

DPT-807A-HA

Albalite lense, Clear Hazy Reflector, White Ring




DPT-808X-HA

Cross Louver, Clear Hazy Reflector, White Ring



DPT-808X-HA

Cross Louver, Clear Hazy Reflector, White Ring

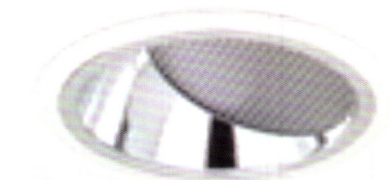

Ring Replacement:

Chrome Ring



Gold Ring



Satin Nickel Ring



8" COMPACT FLUORESCENT RECESS, NON DIMMING

8" COMPACT FLUORESCENT RECESS, DIMMABLE

DD842N-2HU

NEW CONSTRUCTION, NON-IC, HORIZONTAL

Lamps: 2x42, 2x32, 2x26 Watt CFL

Ballast: DEEP ROOF DIMMING BALLAST-BF042D: 98% HPF, 10-100% Dimmable 120-277 Universal Voltage




Dimmer: BD-A(10 Amp), BD-B(16 Amp)

For 120V, 2x42 Watt application: BD-A support up to 14 fixtures, BD-B support up to 22 fixtures

For 120V, 2x32 Watt application: BD-A support up to 18 fixtures, BD-B support up to 29 fixtures

For 120V, 2x26 Watt application: BD-A support up to 22 fixtures, BD-B support up to 36 fixtures

Overload the dimmer may result in breakdown, dimmer replacement may be required.

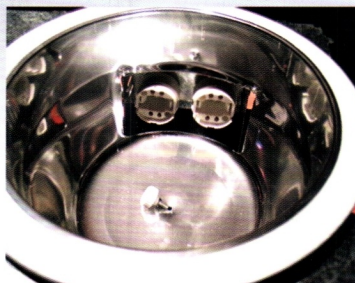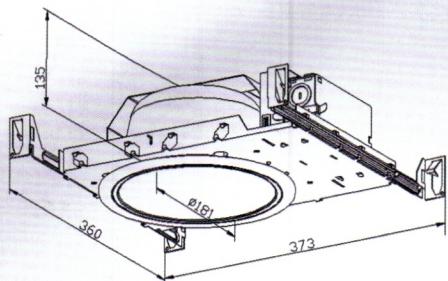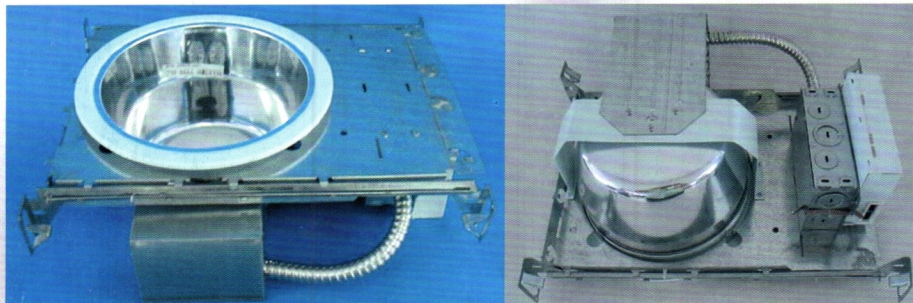

*Screw knob fastened reflector provide approx. 1cm thickness of sheet rocks housing.

*Another screw of longer length for thicker sheet included.

Housing Features

- Thermally Protected
- 10-100% Dimmable State of Art Ballast
- Wire Through Junction Box with 7 knockouts of 3/4"
- 4 Romex Pry-outs
- Hanger Bar with 16" to 24" joist span

Listings

- ETL and ETLC
- Ballast UL and ULC

8" COMPACT FLUORESCENT RECESS, DIMMABLE

8" COMPACT FLUORESCENT RECESS, DIMMABLE

DD842R-2HU

REMODEL, NON-IC, HORIZONTAL

Lamps: 2x42, 2x32, 2x26 Watt CFL

Ballast: DEEP ROOF DIMMING BALLAST-BF-042D: 98% HPF, 10-100% Dimmable 120-277 Universal Voltage



Dimmer: BD-A(10 Amp), BD-B(16 Amp)

For 120V, 2x42 Watt application: BD-A support up to 14 fixtures, BD-B support up to 22 fixtures

For 120V, 2x32 Watt application: BD-A support up to 18 fixtures, BD-B support up to 29 fixtures

For 120V, 2x26 Watt application: BD-A support up to 22 fixtures, BD-B support up to 36 fixtures

Overload the dimmer may result in breakdown, dimmer replacement may be required.

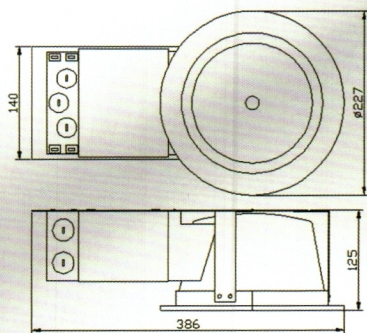

3 adjustable supports accommodate up to 2 cm thickness of sheet rocks.

Housing Features

- Thermally Protected
- 10-100% Dimmable State of Art Ballast
- Wire Through Junction Box with 7 knockouts of 3/4"
- 4 Romex Pry-outs

Listings

- ETL and ETLC
- Ballast UL and ULC

8" COMPACT FLUORESCENT RECESS, DIMMABLE

DD842IC-2HU

NEW CONSTRUCTION, IC, HORIZONTAL

Lamps: 2x26 Watt CFL

Ballast: DEEP ROOF DIMMING BALLAST-BF042D:98% HPF, 10-100% Dimmable 120-277 Universal Voltage


Dimmer: BD-A(10 Amp), BD-B(16 Amp)

For 120V, 2x42 Watt application: BD-A support up to 14 fixtures, BD-B support up to 22 fixtures

For 120V, 2x32 Watt application: BD-A support up to 18 fixtures, BD-B support up to 29 fixtures

For 120V, 2x26 Watt application: BD-A support up to 22 fixtures, BD-B support up to 36 fixtures

Overload the dimmer may result in breakdown, dimmer replacement maybe required.

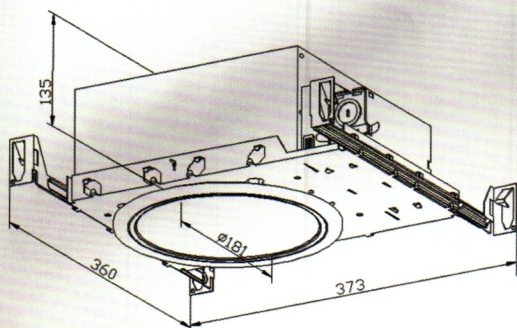

*Screw knob fastened reflector provide approx. 1cm thickness of sheet rocks housing.

*Another screw of longer length for thicker sheet included.

Housing Features

- Thermally Protected
- 10-100% Dimmable State of Art Ballast
- Wire Through Junction Box with 7 knockouts of 3/4"
- 4 Romex Pry-outs
- Insulation Contact

Listings

- ETL and ETLC
- Ballast UL and ULC

8" COMPACT FLUORESCENT RECESS, DIMMABLE

8" COMPACT FLUORESCENT RECESS, DIMMABLE



DPT-805C-H

Clear Hazy Reflector



DPT-805G-H

Gold Reflector



DPT-808LA

Albalite Lense Blade



DPT-801W-H

Clear Hazy Reflector
White Baffle



DPT-801B-H

Clear Hazy Reflector
Black Baffle



DPT-808LX

Cross Blade




DPT-808LW

Wheel Blade



DPT-808LA



DPT-808LX

Replacement Rings



**Chrome
Wide Ring**



**Gold
Wide Ring**



**Satin Nickel
Wide Ring**