



6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE

DP601N-1HU : Non Dimming

Non-IC, NEW CONSTRUCTION, VERTICAL

Lamps : 1x26, 1x32, 1x42 watts CFL

Ballast : Advance HPF, 120-277 Intellivolt

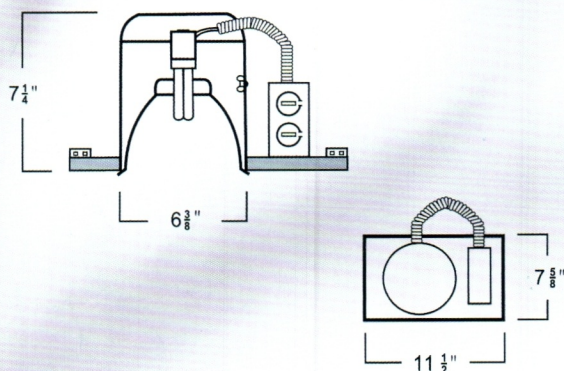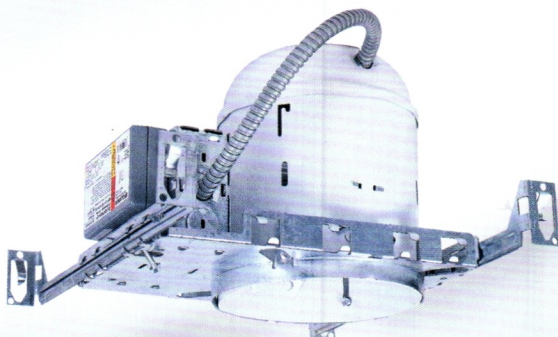

Housing Features

- For Non-Insulated ceiling or 3" space between Housing and Insulation
- Thermally Protected
- Wire Through Junction Box
- Four Romex pry-outs with strain relief
- Adjustable Hanger Bar with 16" to 24" joist span
- 7 1/2" height allows use in 2" x8" joist construction
- Housing adjusts to accommodate up to 2" thick ceilings

Listings



- UL Damp Location, Feed Through
- CSA Certified

DD601N-1HU : Dimmable

Non-IC, NEW CONSTRUCTION, VERTICAL

Lamps : 1x26, 1x32, 1x42 watts CFL

Ballast : Deep Roof 98/99 % HPF, 100 - 277 VAC input
1 - 100 % dimmable, 0 - 10 VDC interface

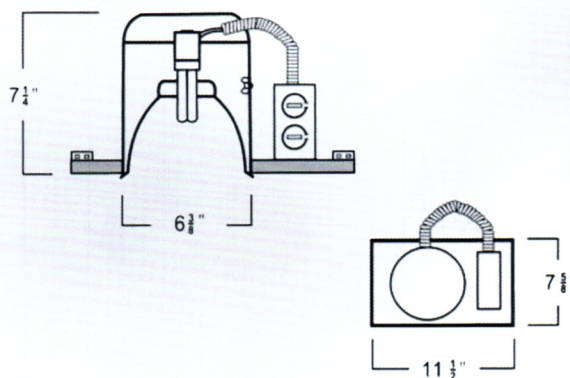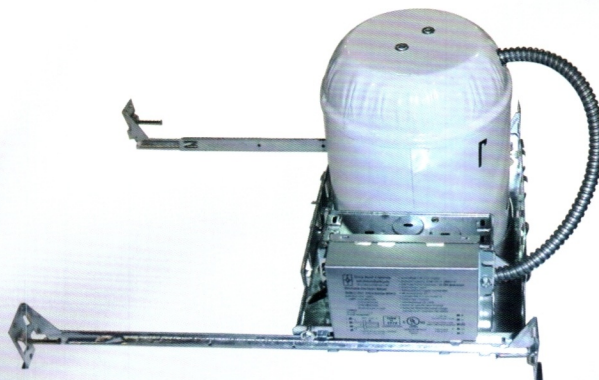

Housing Features

- For Non-Insulated ceiling or 3" space between Housing and Insulation
- Thermally Protected
- Wire Through Junction Box
- Four Romex pry-outs with strain relief
- Adjustable Hanger Bar with 16" to 24" joist span
- 7 1/2" height allows use in 2" x8" joist construction
- Housing adjusts to accommodate up to 2" thick ceilings

Listings



- UL Damp Location, Feed Through
- CSA Certified

601R-1HU : Non Dimming

Non-IC, REMODEL, VERTICAL

Lamps: 1X26, 1X32, 1X42 Watt CFL

Ballast: Advance HPF, 120-277 Intellivolt

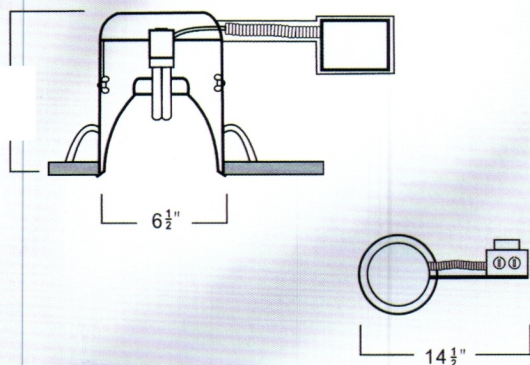
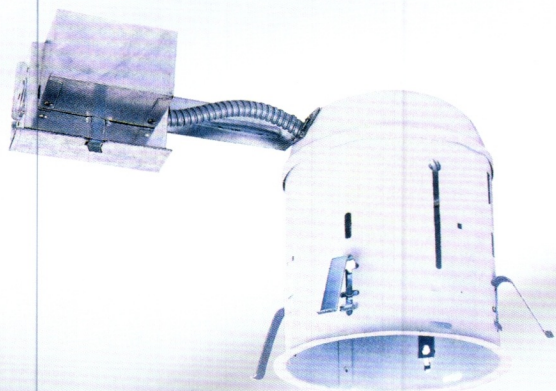


DD601N-1HU : Dimmable

Non-IC, REMODEL, VERTICAL

Lamps: 1X26, 1X32, 1X42 Watt CFL

Ballast: Deep Root 98/99% HPF, 100-277 VAC input
1-100% dimmable, 0-10 VDC interface

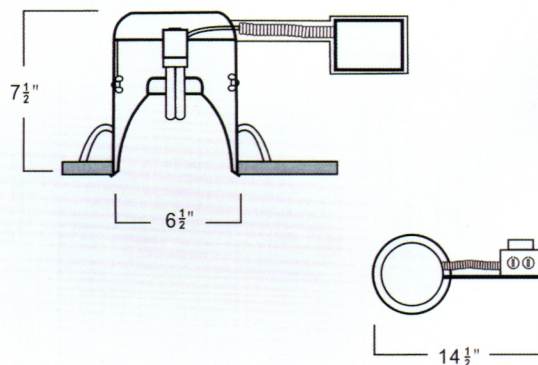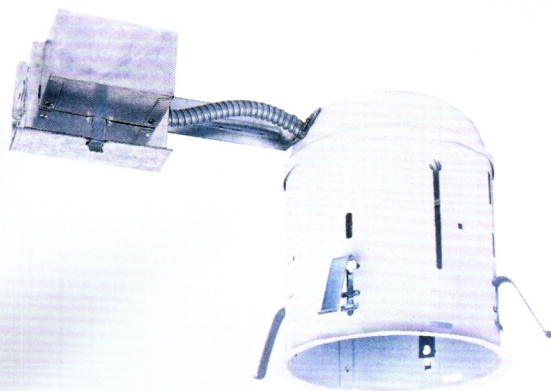

Housing Features

- For Non-Insulated ceiling or 3" space between Housing and Insulation
- Thermally Protected
- Wire Through Junction Box
- Four Romex pry-outs with strain relief
- Unit slips through 6 1/2" ceiling opening
- Four Remodeling clips secure housing and accommodate various ceiling thickness

Listings

- UL Damp Location, Feed Through
- CSA Certified

Housing Features

- For Non-Insulated ceiling or 3" space between Housing and Insulation
- Thermally Protected
- Wire Through Junction Box
- Four Romex pry-outs with strain relief
- Unit slips through 6 1/2" ceiling opening
- Four Remodeling clips secure housing and accommodate various ceiling thickness

Listings

- UL Damp Location, Feed Through
- CSA Certified



DP601IC(AT)-1HU : Non Dimming DD601IC(AT)-1HU : Dimmable

IC(AIR TIGHT), NEW CONSTRUCTION, VERTICAL

Lamps: 1x26 Watt CFL

Ballast: Advance HPF, 120-277 Intellivolt

Dimming Ballast: Deep Roof 98/99% HPF, 100-277 VAC input
1-100% Dimmable, 0-10 VDC interface

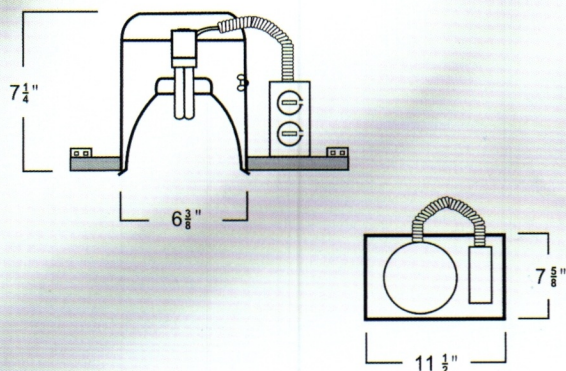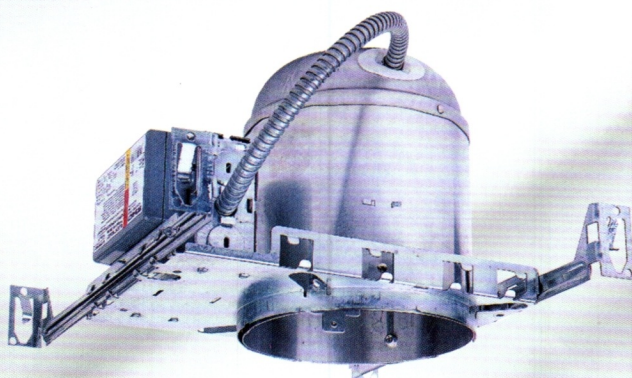

Housing Features

- For direct contact with thermal insulation
- Thermally Protected
- Wire Through Junction Box
- Four Romex pry-outs with strain relief
- Adjustable Hanger Bar up 24" and can be repositioned 90 for easy installation
- Housing adjusts to accommodate up to 2" thick ceilings
- Insulation Contact

Listings

- UL Damp Location, Feed Through
- CSA Certified
- WSEC for Air Tight



DP601ICR(AT)-1HU : Non Dimming DD601ICR(AT)-1HU : Dimmable

IC(AIR TIGHT), REMODEL, VERTICAL

Lamps: 1x26 Watt CFL

Ballast: Advance HPF, 120-277 Intellivolt

Dimming Ballast: Deep Roof 98/99% HPF, 100-277 VAC input
1-100% Dimmable, 0-10 VDC interface

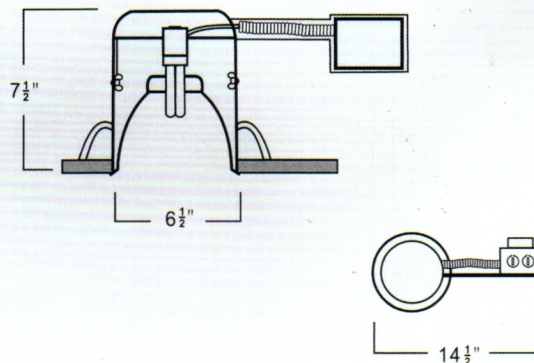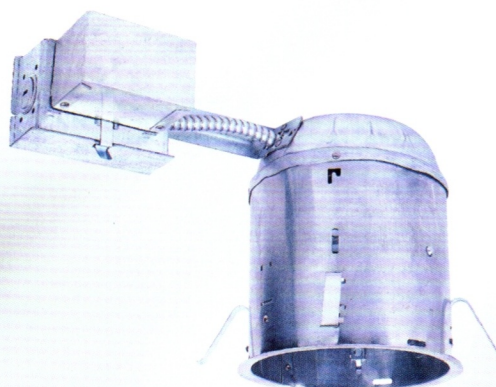

Housing Features



- For direct contact with thermal insulation
- Thermally Protected
- Wire Through Junction Box
- Four Romex pry-outs with strain relief
- Unit slips through 6 1/2" ceiling opening
- Four Remodeling clips secure housing and accommodate various ceiling thickness
- Insulation Contact

Listings

- UL Damp Location, Feed Through
- CSA Certified
- WSEC for Air Tight



DD601IC-DW-1HU : Non Dimming

IC, DOUBLE WALL NEW CONSTRUCTION, VERTICAL
Lamps: 1X26, 1X32, 1X42 Watt CFL
Ballast: Advance HPF, 120-277 Intellivolt

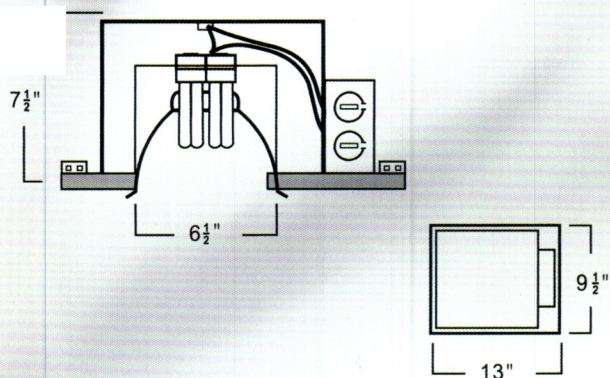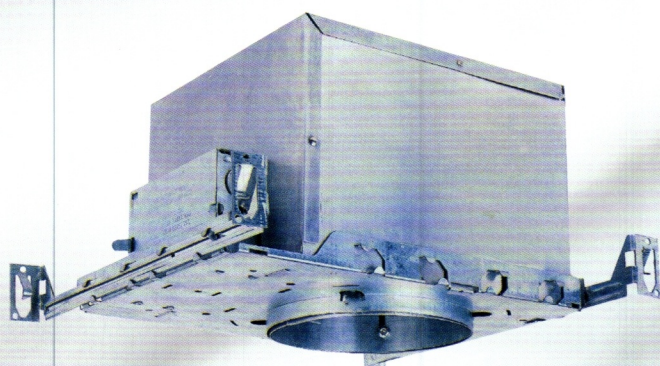

DD601IC-DW-1HU : Dimmable

IC (AIR TIGHT), NEW CONSTRUCTION, VERTICAL
DOUBLE WALL
Lamps: 1X26, 1X32, 1X42 Watt CFL
Ballast: Deep Roof 98/99% HPF, 100-277 VAC input
1-100% dimmable, 0-10 VDC interface

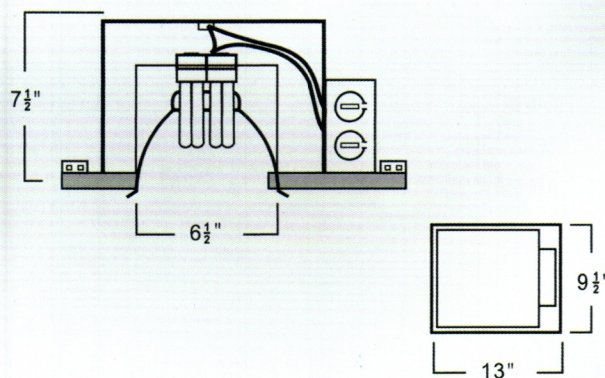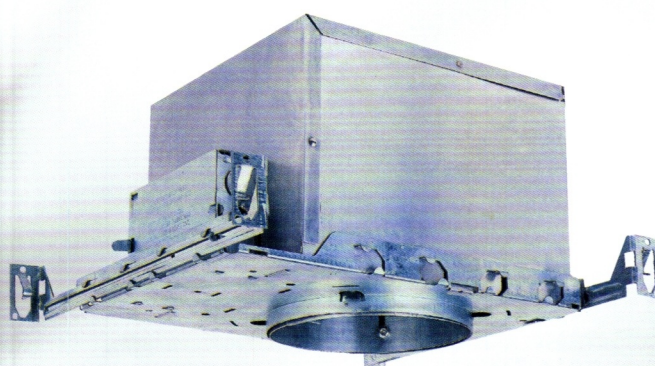

Housing Features

- For direct contact with thermal insulation
- Thermally Protected
- Wire Through Junction Box
- Four Romex pry-outs with strain relief
- Adjustable Hanger Bar with 16" to 24" joist span
- 7 1/2" height allows use in 2"x8" joist construction
- Housing adjusts to accommodate up to 2" thick ceilings

Listings

- UL Damp Location, Feed Through
- CSA Certified
- WSEC for Air Tight

Housing Features

- For direct contact with thermal insulation
- Thermally Protected
- Wire Through Junction Box
- Four Romex pry-outs with strain relief
- Adjustable Hanger Bar with 16" to 24" joist span
- 7 1/2" height allows use in 2"x8" joist construction
- Housing adjusts to accommodate up to 2" thick ceilings

Listings

- UL Damp Location, Feed Through
- CSA Certified
- WSEC for Air Tight

6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE



DPT615B

Black Cone Baffle



DPT615W

White Cone Baffle



DPT655C

Aluminum Cone
Chrome Reflector
PLC Lamps




DPT655G

Aluminum Cone
Gold Reflector
PLC Lamps



DPT655C

Cone Reflector



DPT658CB

Regressed Baffle
Chrome Cone Reflector
PLC Lamps




DPT658CB

Reflector with Black Baffle





DPT658CW

Reflector with White Baffle




6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE

6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE





DPT67A

Albalite
White Trim
Cone Reflector



DPT67F

Fresnel
White Trim
Cone Reflector



DPT67D

Drop Opal
White Trim
Cone Reflector




DPT67AG

Albalite
Gold Trim
Cone Reflector




DPT67F

Fresnel
Gold Trim
Cone Reflector



DPT67D

Drop Opal
Gold Trim
Cone Reflector



DPT67AC

Albalite
Chrome Trim
Cone Reflector



DPT67FC

Fresnel
Chrome Trim
Cone Reflector



DPT67DC

Drop Opal
Chrome Trim
Cone Reflector



DPT67AS

Albalite
Satin Nickel Trim
Cone Reflector



DPT67FS


Fresnel
Satin Nickel Trim
Cone Reflector



DPT67DS


Drop Opal
Satin Nickel Trim
Cone Reflector

6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE



DPT671D

Drop Opal
Black Baffle
White Ring
Cone Reflector



DPT675D

Drop Opal
Chrome Reflector
White Ring
Cone Reflector



DPT67DG

Drop Opal
Black Baffle
Gold Ring
Cone Reflector



DPT675DG

Drop Opal
Chrome Reflector
Gold Ring
Cone Reflector



DPT671DC

Drop Opal
Black Baffle
Chrome Ring
Cone Reflector



DPT675DC

Drop Opal
Chrome Reflector
Chrome Ring
Cone Reflector



DPT671DS

Drop Opal
Black Baffle
Satin Nickel Ring
Cone Reflector



DPT675DS

Drop Opal
Chrome Reflector
Satin Nickel Ring
Cone Reflector

6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE




DP626N-2HU : Non Dimming DD626N-2HU : Dimmable

NON-IC, NEW CONSTRUCTION, HORIZONTAL

Lamps: 2x26 Watt CFL

Ballast: Advance HPF, 120-277 Intellivolt

Dimming Ballast: Deep Roof 98/99% HPF, 100-277 VAC input
1-100% Dimmable, 0-10 VDC interface

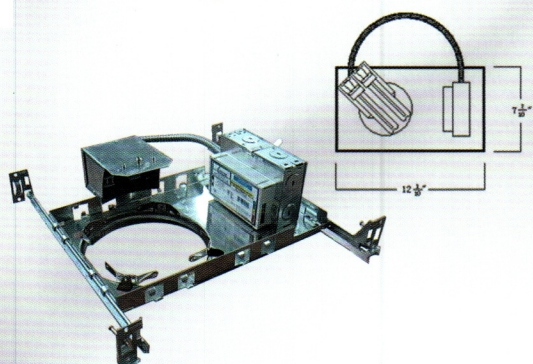
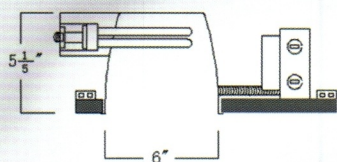
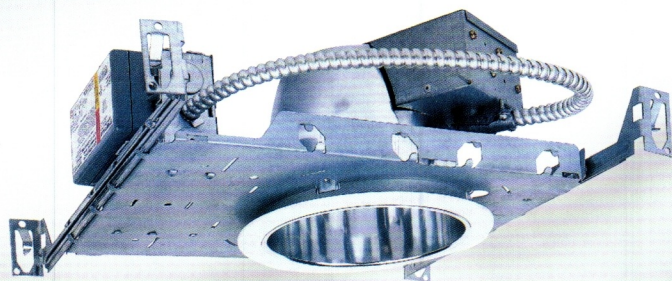


DP618N-2HU : Non Dimming DD618N-2HU : Dimmable

NON-IC, NEW CONSTRUCTION, HORIZONTAL

Lamps: 2x18 Watt CFL

Ballast: Advance HPF, 120-277 Intellivolt

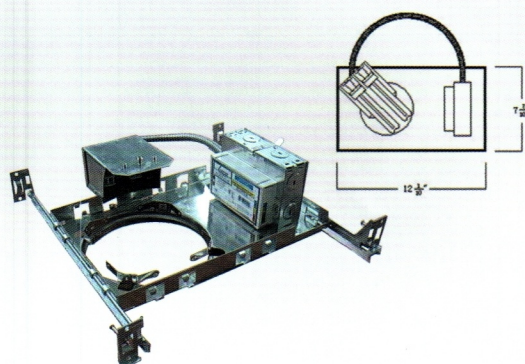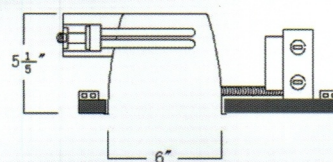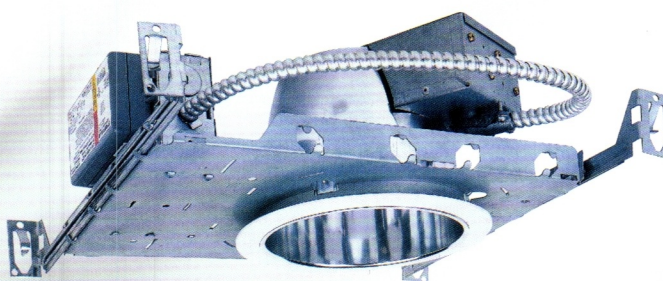

Housing Features

For Non-Insulated ceiling or 3" space between Housing and Insulation

Thermally Protected

Wire Through Junction Box

Four Romex pry-outs with strain relief

Adjustable Hanger Bar with 16" to 24" joist span

Housing adjusts to accommodate up to 2" thick ceilings

Housing Features

● For Non-Insulated ceiling or 3" space between Housing and Insulation

● Thermally Protected

● Wire Through Junction Box

● Four Romex pry-outs with strain relief

● Adjustable Hanger Bar with 16" to 24" joist span

● Housing adjusts to accommodate up to 2" thick ceilings

Listings

- UL Damp Location, Feed Through
- CSA Certified

Listings

- UL Damp Location, Feed Through
- CSA Certified

6" COMPACT FLUORESCENT, NON DIMMING AND DIMMABLE



DPT65G-H


Gold Reflector



DPT658CW-H

Chrome Reflector

White Baffle

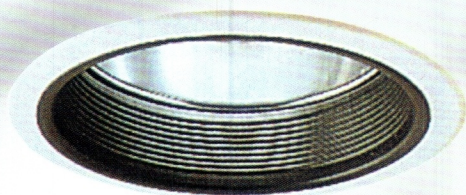

DPT658CB-H


Chrome Reflector

Black Baffle



DPT65C-H

Chrome Reflector

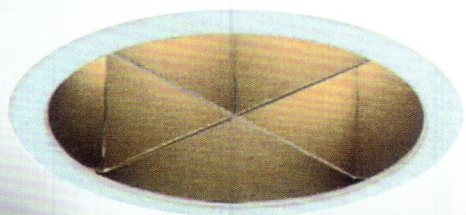

DPT659X-H

Chrome Reflector

Cross Louver