

T6.5 - TUBULAR LAMPS

Intermediate & DC Bases

INCANDESCENT



T6.5/DC/CL



T6.5/DC/FR




T6.5/N/CL

←80"→



T6.5/N/FR

5.25"

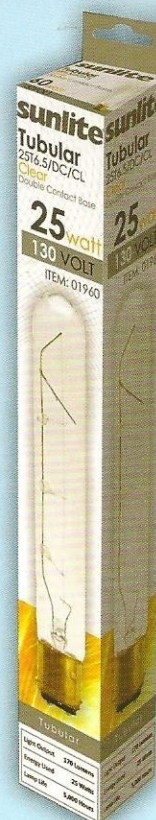

T6.5 TUBULAR LAMPS

- Available in frost or clear
- Applications include appliances, exit signs and showcase lighting

120 & 130 VOLT >>

Item #	Description	Bulb Type	Base	Finish	Watts	Volts	Lumens	Hours	MOL	Pkg.
01940	20T6.5/DC/CL	T6.5	Double Contact	Clear	20	120	90	5,000	5.25	25/500
01945	20T6.5/DC/FR	T6.5	Double Contact	Frost	20	120	90	5,000	5.25	25/500
01950	20T6.5/N/CL	T6.5	Intermediate	Clear	20	120	90	5,000	5.25	25/500
01955	20T6.5/N/FR	T6.5	Intermediate	Frost	20	120	90	5,000	5.25	25/500
01960	25T6.5/DC/CL	T6.5	Double Contact	Clear	25	130	170	5,000	5.25	25/500
01965	25T6.5/DC/FR	T6.5	Double Contact	Frost	25	120	170	5,000	5.25	25/500
01970	25T6.5/N/CL	T6.5	Intermediate	Clear	25	120	170	5,000	5.25	25/500
01975	25T6.5/N/FR	T6.5	Intermediate	Frost	25	120	170	5,000	5.25	25/500
01957	25T6.5/DC/CL/CD1	T6.5	Double Contact	Clear	25	120	170	5,000	5.25	25/500
01967	25T6.5/N/CL/CD1	T6.5	Intermediate	Clear	25	120	170	5,000	5.25	25/500
01980	40T6.5/DC/CL	T6.5	Double Contact	Clear	40	120	290	5,000	5.25	25/500
01985	40T6.5/DC/FR	T6.5	Double Contact	Frost	40	120	290	5,000	5.25	25/500
01990	40T6.5/N/CL	T6.5	Intermediate	Clear	40	120	290	5,000	5.25	25/500
01995	40T6.5/N/FR	T6.5	Intermediate	Frost	40	120	290	5,000	5.25	25/500

CD - Carded