



COMMERCIAL FIXTURES

SLIM CHANNEL SERIES

FEATURES AND BENEFITS


- Body houses all wiring and components for ease of installation
- Cover/lid fastens with two screws, no components
- Push-up Sockets
- Available (L)s 2' to 8' (nominal)
- Surface, stem or chain mountable

ADDITIONAL OPTIONS

- Emergency battery backup
- Silver reflector
- Plug

APPLICATIONS

Fluorescent premium grade channel fixture. For use in indoor applications such as factories, warehouses, workshops, utility areas, coves and public buildings.

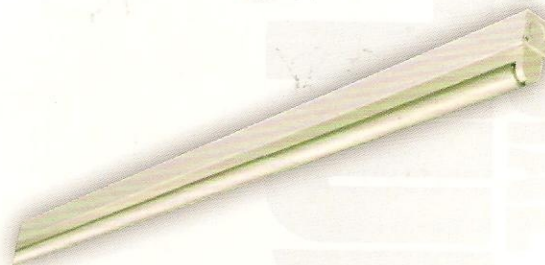

1 LITE STANDARD

SC-1-F14T5-120V • 92200

22.44" (L) • 1.375" (W) • 1.375" (D) • 120 Volt
Uses One F14T5 Lamp*

SC-1-F21T5-120V • 92201

34.28" (L) • 1.375" (W) • 1.375" (D) • 120 Volt
Uses One F21T5 Lamp*

SC-1-F28T5-120V • 92202

46" (L) • 1.375" (W) • 1.375" (D) • 120 Volt
Uses One F28T5 Lamp*

SC-1-F35T5-120V • 92203

57.8" (L) • 1.375" (W) • 1.375" (D) • 120 Volt
Uses One F35T5 Lamp*

SC-1-F24T5HO-120V • 92204

22.44" (L) • 1.375" (W) • 1.375" (D) • 120 Volt
Uses One F24T5HO Lamp*

SC-1-F39T5HO-120V • 92205

34.28" (L) • 1.375" (W) • 1.375" (D) • 120 Volt
Uses One F39T5HO Lamp*

SC-1-F54T5HO-120V • 92206

46" (L) • 1.375" (W) • 1.375" (D) • 120 Volt
Uses One F54T5HO Lamp*

SC-1-F80T5HO-120V • 92207

57.8" (L) • 1.375" (W) • 1.375" (D) • 120 Volt
Uses One F80T5HO Lamp*

2 LITE STANDARD

SC-2-F28T5-120V • 92210

46" (L) • 2" (W) • 1.375" (D) • 120 Volt
Uses Two F28T5 Lamps*

SC-2-F54T5HO-120V • 92213

46" (L) • 2" (W) • 1.375" (D) • 120 Volt
Uses Two F54T5HO Lamps*

TANDEM

SCT-4-F54T5HO-120V • 92257

92.12" (L) • 2" (W) • 1.375" (D) • 120 Volt
Uses Four F54T5HO Lamps*