



COMMERCIAL FIXTURES VT & VTS SERIES

FEATURES AND BENEFITS

- Enclosed and gasketed housing will withstand most critical environments.
- Weather and chemical resistant, corrosion free, and impervious to vapors, dust, and moisture.
- Surface, stem or chain mountable


ADDITIONAL OPTIONS

- Emergency battery backup
- Plug

APPLICATIONS

Food handling and processing facilities, refrigerated storage, drug and chemical plants. Use in shower areas, parking garages, pedestrian and roadway tunnels, and outdoor public areas.

VAPOR TIGHT

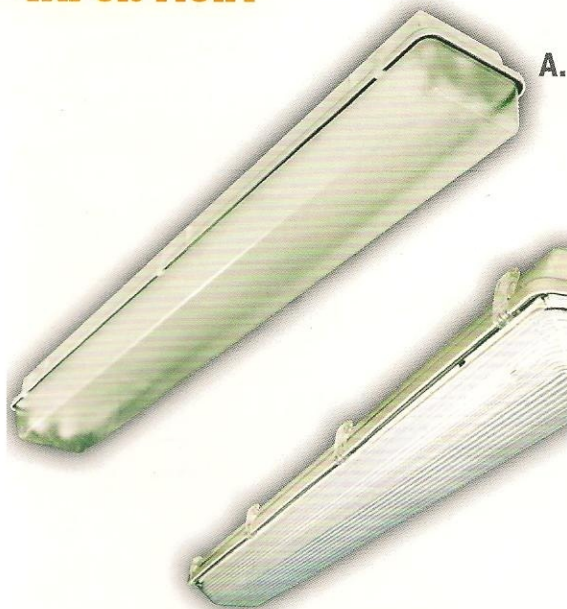

A. VT-2-F48T12HO-120V • 92629

50" (L) • 0" (W) • 0" (D) • 120 Volt
Uses Two F48T12HO Lamps*

VT-2-F96T12HO-120V • 92630

98" (L) • 0" (W) • 0" (D) • 120 Volt
Uses Two F96T12HO Lamps*



VAPOR TIGHT SLIM

B. VTS-2-F17T8-120V • 92654

27.7" (L) • 7.375" (W) • 4.375" (D) • 120 Volt
Uses Two F17T8 Lamps*

VTS-2-F96T8HO-120V • 92658

100" (L) • 7.375" (W) • 4.375" (D) • 120 Volt
Uses Two F96T8HO Lamps*

VTS-2-F32T8-120V • 92655

51.7" (L) • 7.375" (W) • 4.375" (D) • 120 Volt
Uses Two F32T8 Lamps*

VTS-2-F54T5HO-120V • 92707

51.7" (L) • 7.375" (W) • 4.375" (D) • 120 Volt
Uses Two F54T5HO Lamps*

C. VTS-4-F32T8-120V • 92670

51.8" (L) • 14.6" (W) • 5.94" (D) • 120 Volt
Uses Four F32T8 Lamps*
Uses Two Ceiling Mount or V-Hook
(Not Included - See Below)

VTS-2-F96T8-120V • 92657

100" (L) • 7.375" (W) • 4.375" (D) • 120 Volt
Uses Two F96T8 Lamps*

VTS-4-F54T5HO-120V • 92711

51.8" (L) • 14.6" (W) • 5.94" (D) • 120 Volt
Uses Four F54T5HO Lamps*
Uses Two Ceiling Mount or V-Hook
(Not Included - See Below)

VAPOR TIGHT SLIM TANDEM

VTST-4-F32T8-120V • 92675

100" (L) • 7.375" (W) • 4.375" (D) • 120 Volt
Uses Four F32T8 Lamps*

VTST-4-F54T5HO-120V • 92729

100" (L) • 7.375" (W) • 4.375" (D) • 120 Volt
Uses Four F54T5HO Lamps*

HOOKS



D. CEILING MOUNT HOOK • 92681

E. PENDANT MOUNT V-HOOK • 92680