

FEATURES AND BENEFITS

- Various cell/lens configurations available
- Access plate for quick wiring
- Quick Connect Adapter

ADDITIONAL OPTIONS

- 20 Gauge (NYC)
- Emergency battery backup
- Silver reflector
- Multi-volt ballast
- Wire whip

APPLICATIONS

Ideal for commercial and industrial buildings requiring general illumination. Premium quality flanged troffer suitable for drywall, plaster and Z-spline ceilings.



RECESSED FLANGED LAY-IN

RF-1X4-2-F32T8-120V-SPL • 90174

1 x 4 Recessed Flanged Lay-In for Sheetrock
Standard Prismatic Lens

48" (L) • 12.875" (W) • 3.6875" (D) • 120 Volt
Uses Two F32T8 Lamps*

RF-1X4-2-F32T8-120V-A08 • 90170

1 x 4 Recessed Flanged Lay-In for Sheetrock
8 Cell Aluminum Parabolic Louver

48" (L) • 12.875" (W) • 3.6875" (D) • 120 Volt
Uses Two F32T8 Lamps*

RECESSED LAY-IN

R-2X2-2-FB032T8U6-120V-SPL • 90035

2 x 2 Recessed Lay-In
Standard Prismatic Lens

24" (L) • 23.875" (W) • 3.75" (D) • 120 Volt
Uses Two FB032T8U6 Lamps*

R-2X2-2-FB032T8U6-120V-A09 • 90091

2 x 2 Recessed Lay-In
9 Cell Aluminum Parabolic Louver

24" (L) • 23.875" (W) • 3.75" (D) • 120 Volt
Uses Two FB032T8U6 Lamps*

R-2X4-4-F32T8-120V-SPL • 90060

2 x 4 Recessed Lay-In
Standard Prismatic Lens

48" (L) • 23.875" (W) • 3.75" (D) • 120 Volt
Uses Four F32T8 Lamps*

R-2X4-4-F32T8-120V-A18 • 90085

2 x 4 Recessed Lay-In
18 Cell Aluminum Parabolic Louver

48" (L) • 23.875" (W) • 3.75" (D) • 120 Volt
Uses Four F32T8 Lamps*



RECESSED DEEP LAY-IN

FEATURES AND BENEFITS

- Deep design
- Access plate for quick wiring
- 120 Volt Ballast
- Quick Connect Adapter

RD-2X2-2-FB032T8U6-120V-AD09 • 90188

2 x 2 Recessed Deep Lay-In
9 Cell Aluminum Parabolic Louver
24" (L) • 23.75" (W) • 5" (D) • 120 Volt
Uses Two FBO32T8U6 Lamps*


RD-2X4-3-F32T8-120V-AD18 • 90201

2 x 4 Recessed Deep Lay-In
18 Cell Aluminum Parabolic Louver
48" (L) • 23.75" (W) • 5" (D) • 120 Volt
Uses Three F32T8 Lamps*

RD-2X4-4-F32T8-120V-AD18 • 90207

2 x 4 Recessed Deep Lay-In
18 Cell Aluminum Parabolic Louver
48" (L) • 23.75" (W) • 5" (D) • 120 Volt
Uses Four F32T8 Lamps*

Premium recessed deep cell parabolic T-bar troffer designed for maximum efficiency and visual comfort. Ideal for commercial and industrial buildings requiring general illumination with recessed configurations and low glare.

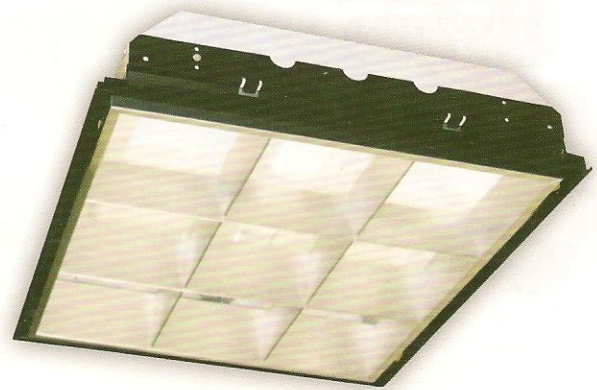

ADDITIONAL OPTIONS

- Emergency battery backup
- Silver reflector
- Wire whip
- Multi Volt Ballast

APPLICATIONS

RECESSED CENTER BASKET

FEATURES AND BENEFITS

- Access plate for quick wiring
- Quick Connect Adapter

ADDITIONAL OPTIONS

- 20 Gauge (NYC)
- Emergency battery backup
- Wire whip
- Multi-Volt Ballast


RDIC-2X2-3-F17T8-120V • 90225

2 x 2 Recessed Direct/Indirect Center Basket
24" (L) • 23.8125" (W) • 5.4375" (D) • 120 Volt
Uses Three F17T8 Lamps*

RDIC-2X4-3-F32T8-120V • 90239

2 x 4 Recessed Direct/Indirect Center Basket
48" (L) • 23.8125" (W) • 5.4375" (D) • 120 Volt
Uses Three F32T8 Lamps*

Premium grade recessed troffer dish with a center basket provides direct/indirect light with modern styling and (H) visual comfort. For use in commercial and industrial buildings where low glare, (H) quality, design and ease of installation are required.

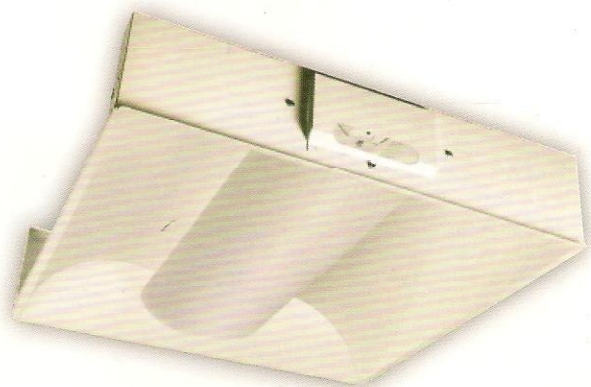

FEATURES AND BENEFITS

- Various cell/lens configurations available
- Easy access plate for quick wiring
- Quick Connect Adapter

ADDITIONAL OPTIONS

- Emergency battery backup
- Chrome reflector

APPLICATIONS

Premium grade surface mounted ceiling luminaire with a limitless range of applications. For use in indoor applications where aesthetics and quality are important. Designed for schools, offices, commercial and public buildings.

2X2 SURFACE

S-2X2-2-FB032T8U6-120V-SPL • 90291

2 x 2 Surface Luminaire
Standard Prismatic Lens
24" (L) • 24" (W) • 5" (D) • 120 Volt
Uses Two FBO32T8U6 Lamps*

S-2X2-2-FB032T8U6-120V-A09 • 90289

2 x 2 Surface Luminaire
9 Cell Aluminum Parabolic Louver
24" (L) • 24" (W) • 5" (D) • 120 Volt
Uses Two FBO32T8U6 Lamps*



2X4 SURFACE

S-2X4-3-F32T8-120V-A18 • 90286

2 x 4 Surface Luminaire
18 Cell Aluminum Parabolic Louver
48" (L) • 24" (W) • 5" (D) • 120 Volt
Uses Three F32T8 Lamps*

S-2X4-4-F32T8-MV-SPL • 90296

2 x 4 Surface Luminaire
Standard Prismatic Lens
48" (L) • 24" (W) • 5" (D) • Multi Volt
Uses Four F32T8 Lamps*

S-2X4-4-F32T8-MV-A18 • 90298

2 x 4 Surface Luminaire
18 Cell Aluminum Parabolic Louver
48" (L) • 24" (W) • 5" (D) • Multi Volt
Uses Four F32T8 Lamps*





FEATURES AND BENEFITS

- Units are shipped with die cast aluminum joiners installed for suspension and structural continuity.
- Aircraft grade suspension cables available in 24" - 50" (L)s.

APPLICATIONS

Open office ambient lighting for virtually glare free and shadow free illumination.

OPTIONS

This fixture is available with several options of feed kits with electrical cord, non-feed kits with no electrical cord and end caps that are sold separately and required for assembly. Speak to a sales representative for assistance with configuring the right fixture for you.

DIRECT/INDIRECT PENDANT

PDI-2-F28T5-MV • 91000

Direct/Indirect Pendant
White Powder Finish
56.5" (L) • 7.75" (W) • 2" (D) • Multi Volt
Uses Two F28T5 Lamps*

PDI-2-F54T5HO-MV • 91001

Direct/Indirect Pendant
White Powder Finish
56.5" (L) • 7.75" (W) • 2" (D) • Multi Volt
Uses Two F54T5HO Lamps*

PDI-3-F28T5-MV • 91002

Direct/Indirect Pendant
White Powder Finish
56.5" (L) • 7.75" (W) • 2" (D) • Multi Volt
Uses Three F28T5 Lamps*

PDI-3-F54T5HO-MV • 91003

Direct/Indirect Pendant
White Powder Finish
56.5" (L) • 7.75" (W) • 2" (D) • Multi Volt
Uses Three F54T5HO Lamps*

FEED KIT WITH ELECTRIC CORD

ITEM#	DESCRIPTION	LENGTH	CEILING TYPE
91075	PDI/FK/DW/24IN	24"	DRYWALL
91076	PDI/FK/DW/36IN	36"	DRYWALL
91077	PDI/FK/DW/50IN	50"	DRYWALL
91078	PDI/FK/DC/24IN	24"	DROP CEILING
91079	PDI/FK/DC/36IN	36"	DROP CEILING
91080	PDI/FK/DC/50IN	50"	DROP CEILING

NON-FEED KIT NO ELECTRIC CORD

ITEM#	DESCRIPTION	LENGTH	CEILING TYPE
91081	PDI/NFK/DW/24IN	24"	DRYWALL
91082	PDI/NFK/DW/36IN	36"	DRYWALL
91083	PDI/NFK/DW/50IN	50"	DRYWALL
91084	PDI/NFK/DC/24IN	24"	DROP CEILING
91085	PDI/NFK/DC/36IN	36"	DROP CEILING
91086	PDI/NFK/DC/50IN	50"	DROP CEILING

END CAP

DESCRIPTION	ITEM#
PDI/EC END-CAP FOR PDI FIXTURE	91050



FEATURES AND BENEFITS

- Versatile end plate doubles as coupler for continuous row mounting
- Available in (L)s from 24 to 96 inches
- Surface, stem or chain mountable

1 LITE STANDARD

EC-1-F17T8-120V • 92001

24" (L) • 4.25" (W) • 1.75" (D) • 120 Volt
Uses One F17T8 Lamp*

EC-1-F25T8-120V • 92002

36" (L) • 4.25" (W) • 1.75" (D) • 120 Volt
Uses One F25T8 Lamp*

EC-1-F32T8-120V • 92003

48" (L) • 4.25" (W) • 1.75" (D) • 120 Volt
Uses One F32T8 Lamp*

2 LITE STANDARD

EC-2-F17T8-120V • 92050

24" (L) • 4.25" (W) • 1.75" (D) • 120 Volt
Uses Two F17T8 Lamps*

EC-2-F25T8-120V • 92051

36" (L) • 4.25" (W) • 1.75" (D) • 120 Volt
Uses Two F25T8 Lamps*

EC-2-F32T8-120V • 92052

48" (L) • 4.25" (W) • 1.75" (D) • 120 Volt
Uses Two F32T8 Lamps*

4 LITE STANDARD

EC-4-F32T8-120V • 92101

48" (L) • 10.625" (W) • 1.75" (D) • 120 Volt
Uses Four F32T8 Lamps*

EC-4-F96T8-120V • 92104

96" (L) • 10.625" (W) • 1.75" (D) • 120 Volt
Uses Four F96T8 Lamps*

EC-4-F96T12-120V • 92112

96" (L) • 10.625" (W) • 1.75" (D) • 120 Volt
Uses Four F96T12 Lamps*

ADDITIONAL OPTIONS

- 20 Gauge (NYC)
- Emergency battery backup
- Silver reflector
- Plug
- Fixture chains

APPLICATIONS

Fluorescent channel fixture. For use in indoor applications such as: factories, warehouses, workshops, utility areas, coves and public buildings.



SLIMLINE

EC-1-F96T8-120V • 92005

96" (L) • 3.125" (W) • 1.75" (D) • 120 Volt
Uses One F96T8 Lamp*

EC-2-F96T8-120V • 92055

96" (L) • 4.25" (W) • 1.75" (D) • 120 Volt
Uses Two F96T8 Lamps*

EC-2-F96T12-120V • 92064

96" (L) • 4.25" (W) • 1.75" (D) • 120 Volt
Uses Two F96T12 Lamps*

EC-2-F96T12HO-120V • 92065

96" (L) • 4.25" (W) • 1.75" (D) • 120 Volt
Uses Two F96T12HO Lamps*

TANDEM

ECT-2-F32T8-120V • 92151

96" (L) • 4.25" (W) • 1.75" (D) • 120 Volt
Uses Two F32T8 Lamps*

ECT-4-F32T8-120V • 92153

96" (L) • 4.25" (W) • 1.75" (D) • 120 Volt
Uses Four F32T8 Lamps*

ECT-8-F32T8-120V • 92155

96" (L) • 10.625" (W) • 1.75" (D) • 120 Volt
Uses Eight F32T8 Lamps*



COMMERCIAL FIXTURES

SLIM CHANNEL SERIES

FEATURES AND BENEFITS


- Body houses all wiring and components for ease of installation
- Cover/lid fastens with two screws, no components
- Push-up Sockets
- Available (L)s 2' to 8' (nominal)
- Surface, stem or chain mountable

ADDITIONAL OPTIONS

- Emergency battery backup
- Silver reflector
- Plug

APPLICATIONS

Fluorescent premium grade channel fixture. For use in indoor applications such as factories, warehouses, workshops, utility areas, coves and public buildings.

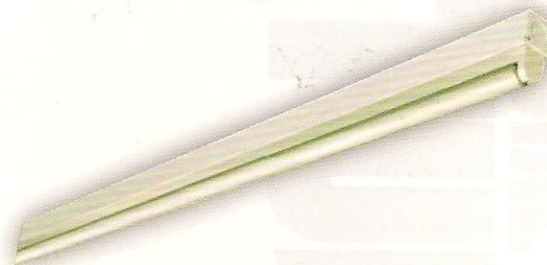

1 LITE STANDARD

SC-1-F14T5-120V • 92200

22.44" (L) • 1.375" (W) • 1.375" (D) • 120 Volt
Uses One F14T5 Lamp*

SC-1-F21T5-120V • 92201

34.28" (L) • 1.375" (W) • 1.375" (D) • 120 Volt
Uses One F21T5 Lamp*

SC-1-F28T5-120V • 92202

46" (L) • 1.375" (W) • 1.375" (D) • 120 Volt
Uses One F28T5 Lamp*

SC-1-F35T5-120V • 92203

57.8" (L) • 1.375" (W) • 1.375" (D) • 120 Volt
Uses One F35T5 Lamp*

SC-1-F24T5HO-120V • 92204

22.44" (L) • 1.375" (W) • 1.375" (D) • 120 Volt
Uses One F24T5HO Lamp*

SC-1-F39T5HO-120V • 92205

34.28" (L) • 1.375" (W) • 1.375" (D) • 120 Volt
Uses One F39T5HO Lamp*

SC-1-F54T5HO-120V • 92206

46" (L) • 1.375" (W) • 1.375" (D) • 120 Volt
Uses One F54T5HO Lamp*

SC-1-F80T5HO-120V • 92207

57.8" (L) • 1.375" (W) • 1.375" (D) • 120 Volt
Uses One F80T5HO Lamp*

2 LITE STANDARD

SC-2-F28T5-120V • 92210

46" (L) • 2" (W) • 1.375" (D) • 120 Volt
Uses Two F28T5 Lamps*

SC-2-F54T5HO-120V • 92213

46" (L) • 2" (W) • 1.375" (D) • 120 Volt
Uses Two F54T5HO Lamps*

TANDEM

SCT-4-F54T5HO-120V • 92257

92.12" (L) • 2" (W) • 1.375" (D) • 120 Volt
Uses Four F54T5HO Lamps*

FEATURES AND BENEFITS

- Die-formed heavy-gauge cold rolled steel housing
- Snap-on cover to simplify installation. Two covers are used for 30-watt tandem and 40-watt tandems
- Snap-in Ends and socket plates
- Ends also function as coupler for continuous row mounting
- Socket plates accept slide-on or screw-down sockets
- White polyester polymer finish with (H) reflectivity
- Surface or pendant mount, individually or in continuous rows
- Sufficient knockouts are provided

APPLICATIONS


An all purpose economy fluorescent 1-light sidemount strip that can be adapted to be a double sidemount, right angle or 3-light strip

FEATURES AND BENEFITS

- Die-formed heavy-gauge steel
- Snaps into housing to cover ballast and wires
 - White polyester polymer finish with minimum of 82% reflectivity
- Soft plastic diffuser edges ensure safe handling
- Bright white color blends into the fixture and promotes a more esthetically pleasing look

APPLICATIONS

Schools, College Dormitories, Closets,
Laundry Areas, Pantries, Hallways,
Health Care Facilities, Residential, Commercial

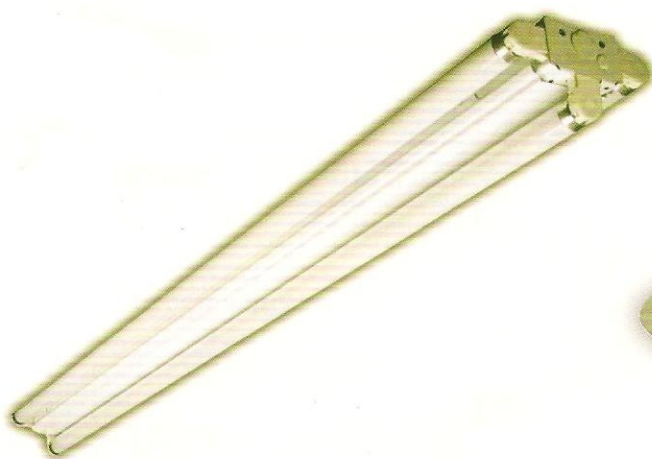

SIDE MOUNT FIXTURE

ECS-1-F32T8-120V • 92180

48" (L) • 3.25" (W) • 2" (D) • 120 Volt
Uses One F32T8 Lamp*

ECS-2-F32T8-120V • 92181

48" (L) • 3.25" (W) • 2" (D) • 120 Volt
Uses Two F32T8 Lamps*

ECS-3-F32T8-120V • 92182

48" (L) • 3.25" (W) • 2" (D) • 120 Volt
Uses Three F32T8 Lamps*



CLOUD FIXTURE

SCL-2-F32T8-120V • 91503

White Body • Soft Edge White Lens
51.44" (L) • 11.25" (W) • 4.4" (D) • 120 Volt
Uses Two F32T8 Lamps*

SCL-4-F17T8-120V • 91520

White Body • Soft Edge White Lens
27.32" (L) • 16.62" (W) • 4.25" (D) • 120 Volt
Uses Four F17T8 Lamps*

SCL-4-F32T8-120V • 91502

White Body • Soft Edge White Lens
51.46" (L) • 16.62" (W) • 4.25" (D) • 120 Volt
Uses Four F32T8 Lamps*



COMMERCIAL FIXTURES

WA SERIES



FEATURES AND BENEFITS

- Clear acrylic diffuser with prismatic bottom and ribbed linear sides
- Diffuser self-aligns and hinges from either side for easy maintenance
- Available in (L)s from 24 upto 96 inches
 - Two and four lamp configuration
- Single or continuous row mounting capability
- Surface, stem or chain mountable

ADDITIONAL OPTIONS

- Emergency battery backup
 - Chrome reflector
- Also Available for T5 lamps

APPLICATIONS

Economically designed narrow wraparound luminaire with low brightness linear sides, provide reliable and efficient lighting. Ideal for use in indoor applications, where low glare and ease of installation is required, such as homes, modular homes, mobile homes, stores and public buildings.

9" WRAP AROUND

WA9-2-F17T8-120V • 92353

24" (L) • 9.25" (W) • 3.3" (D) • 120 Volt
Uses Two F17T8 Lamps*

WA9-2-F32T8-120V • 92355

48" (L) • 9.25" (W) • 3.3" (D) • 120 Volt
Uses Two F32T8 Lamps*

11" WRAP AROUND

WA11-2-F17T8-120V • 92406

24" (L) • 11.3" (W) • 3.375" (D) • 120 Volt
Uses Two F17T8 Lamps*

WA11-2-F96T8-120V • 92410

96" (L) • 11.3" (W) • 3.375" (D) • 120 Volt
Uses Two F96T8 Lamps*

WA11-2-F32T8-120V • 92407

48" (L) • 11.3" (W) • 3.375" (D) • 120 Volt
Uses Two F32T8 Lamps*

WA11-2-F96T12-120V • 92404

96" (L) • 11.3" (W) • 3.375" (D) • 120 Volt
Uses Two F96T12 Lamps*

15" WRAP AROUND

WA15-4-F17T8-120V • 92424

24" (L) • 16" (W) • 3.375" (D) • 120 Volt
Uses Four F17T8 Lamps*

WA15-4-F96T8-120V • 92428

96" (L) • 16" (W) • 3.375" (D) • 120 Volt
Uses Four F96T8 Lamps*

WA15-4-F32T8-120V • 92426

48" (L) • 16" (W) • 3.375" (D) • 120 Volt
Uses Four F32T8 Lamps*

WA15-4-F96T12-120V • 92422

96" (L) • 16" (W) • 3.375" (D) • 120 Volt
Uses Four F96T12 Lamps*

WRAP AROUND TANDEM

WA11T-4-F32T8-120 • 92476

96" (L) • 11.3" (W) • 3.375" (D) • 120 Volt
Uses Four F32T8 Lamps*

WA15T-8-F32T8-120V • 92482

96" (L) • 16" (W) • 3.375" (D) • 120 Volt
Uses Eight F32T8 Lamps*

FEATURES AND BENEFITS


- Energy savings compared to equivalent metal halide luminaire
- Improved light output and greater color rendition than HID
- The shallow dimensions allow fixture to be mounted close to the ceiling; minimizing damage and offering the best space utilization
- Available in 48 inches - (4' (L))
- Standard MIRO 4 reflector provides 94% reflectivity
- T5 (H) Output or T8 ballast

ADDITIONAL OPTIONS

- Cord/Whip
- Emergency battery backup
- Motion sensor
- Fixture chains

APPLICATIONS

Premium grade fluorescent (H) bay fixture. For use in indoor applications such as factories, warehouses and public buildings.

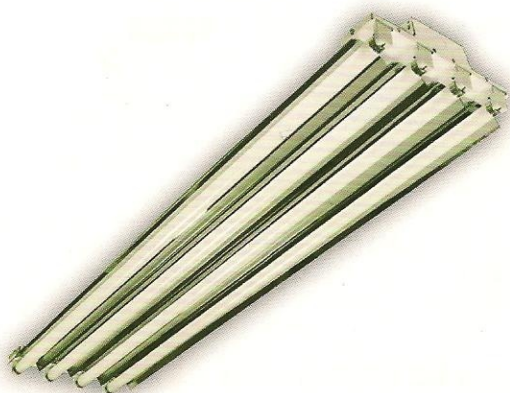

STANDARD HIGH BAY

FHBS-4-F32T8-120V • 92575

48" (L) • 12.2" (W) • 2.2" (D) • 120 Volt
Uses Four F32T8 Lamps*

FHBS-4-F54T5HO-MV • 92576

48" (L) • 12.2" (W) • 2.2" (D) • Multi Volt
Uses Four F54T5HO Lamps*

FHBS-6-F32T8-120V • 92577

48" (L) • 13.6" (W) • 2.4" (D) • 120 Volt
Uses Six F32T8 Lamps*

FHBS-6-F54T5HO-MV • 92578

48" (L) • 13.6" (W) • 2.4" (D) • Multi Volt
Uses Six F54T5HO Lamps*

FEATURES AND BENEFITS


- Improved light output and greater color rendition than HID
- Shallow dimensions allow for fixture mounting close to the ceiling minimizing damage and offering the best space utilization
 - Available in 48 inches - (4' (L))
- Standard MIRO 4 reflector provides 94% reflectivity
 - T5 (H) Output or T8 ballast

ADDITIONAL OPTIONS

- Cord/Whip
- Emergency battery backup
- Motion sensor
- Fixture chains

APPLICATIONS

Modern technology and design produced the premium (H) bay which is excellent for areas requiring (H) levels of illumination. This energy efficient substitute for HID is ideal for retail, warehouse, commercial and manufacturing areas.

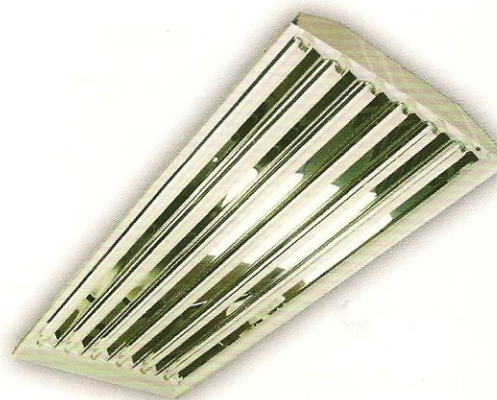

PREMIUM HIGH BAY

FHBP-4-F32T8-120V • 92600

48" (L) • 12.625" (W) • 3.875" (D) • 120 Volt
Uses Four F32T8 Lamps*

FHBP-4-F54T5HO-MV • 92601

48" (L) • 12.625" (W) • 3.875" (D) • Multi Volt
Uses Four F54T5HO Lamps*

FHBP-6-F32T8-120V • 92602

48" (L) • 19.875" (W) • 3.875" (D) • 120 Volt
Uses Six F32T8 Lamps*

FHBP-6-F54T5HO-MV • 92603

48" (L) • 19.875" (W) • 3.875" (D) • Multi Volt
Uses Six F54T5HO Lamps*



COMMERCIAL FIXTURES VT & VTS SERIES

FEATURES AND BENEFITS

- Enclosed and gasketed housing will withstand most critical environments.
- Weather and chemical resistant, corrosion free, and impervious to vapors, dust, and moisture.
- Surface, stem or chain mountable


ADDITIONAL OPTIONS

- Emergency battery backup
- Plug

APPLICATIONS

Food handling and processing facilities, refrigerated storage, drug and chemical plants. Use in shower areas, parking garages, pedestrian and roadway tunnels, and outdoor public areas.

VAPOR TIGHT

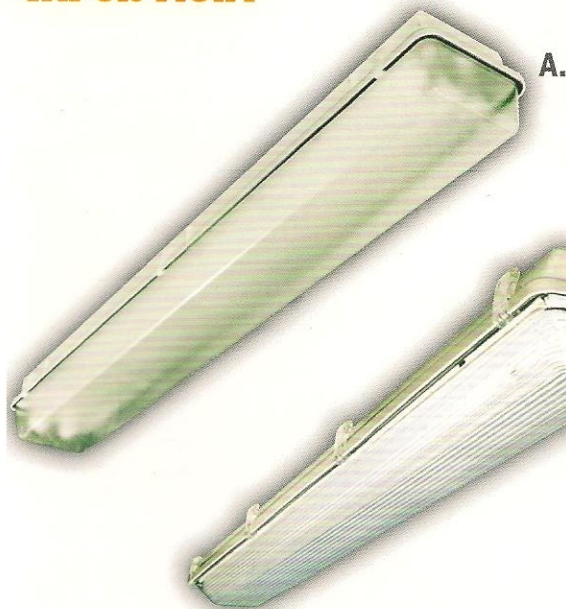

A. VT-2-F48T12HO-120V • 92629

50" (L) • 0" (W) • 0" (D) • 120 Volt
Uses Two F48T12HO Lamps*

VT-2-F96T12HO-120V • 92630

98" (L) • 0" (W) • 0" (D) • 120 Volt
Uses Two F96T12HO Lamps*



VAPOR TIGHT SLIM

B. VTS-2-F17T8-120V • 92654

27.7" (L) • 7.375" (W) • 4.375" (D) • 120 Volt
Uses Two F17T8 Lamps*

VTS-2-F96T8HO-120V • 92658

100" (L) • 7.375" (W) • 4.375" (D) • 120 Volt
Uses Two F96T8HO Lamps*

VTS-2-F32T8-120V • 92655

51.7" (L) • 7.375" (W) • 4.375" (D) • 120 Volt
Uses Two F32T8 Lamps*

VTS-2-F54T5HO-120V • 92707

51.7" (L) • 7.375" (W) • 4.375" (D) • 120 Volt
Uses Two F54T5HO Lamps*

C. VTS-4-F32T8-120V • 92670

51.8" (L) • 14.6" (W) • 5.94" (D) • 120 Volt
Uses Four F32T8 Lamps*
Uses Two Ceiling Mount or V-Hook
(Not Included - See Below)

VTS-2-F96T8-120V • 92657

100" (L) • 7.375" (W) • 4.375" (D) • 120 Volt
Uses Two F96T8 Lamps*

VTS-4-F54T5HO-120V • 92711

51.8" (L) • 14.6" (W) • 5.94" (D) • 120 Volt
Uses Four F54T5HO Lamps*
Uses Two Ceiling Mount or V-Hook
(Not Included - See Below)

VAPOR TIGHT SLIM TANDEM

VTST-4-F32T8-120V • 92675

100" (L) • 7.375" (W) • 4.375" (D) • 120 Volt
Uses Four F32T8 Lamps*

VTST-4-F54T5HO-120V • 92729

100" (L) • 7.375" (W) • 4.375" (D) • 120 Volt
Uses Four F54T5HO Lamps*

HOOKS



D. CEILING MOUNT HOOK • 92681

E. PENDANT MOUNT V-HOOK • 92680

FEATURES AND BENEFITS


- Smooth white opal acrylic wraparound diffuser
- Individual or continuous row mounting
- Post chrome plated steel housing or white enamel finish
- Available in one or two lamp configurations

ADDITIONAL OPTIONS

- Emergency battery backup
- Grounded convenience outlet

APPLICATIONS

Angled one light and two light chrome or white fixtures, provide softly angled light. Designed for bathrooms, kitchens, bulletin boards and above vanity mirrors.

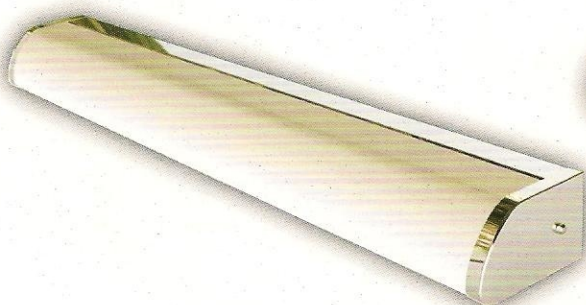

ANGLED BRACKET

BB203-WH-WH-2-F17T8-120V • 92803

White Body • White Lens

24" (L) • 3.25" (W) • 5.25" (D) • 120 Volt

Uses Two F17T8 Lamps*

BB203-WH-WH-2-F32T8-120V • 92805

White Body • White Lens

48" (L) • 3.25" (W) • 5.25" (D) • 120 Volt

Uses Two F32T8 Lamps*

BB203-CH-WH-2-F17T8-120V • 92809

Chrome Body • White Lens

24" (L) • 3.25" (W) • 5.25" (D) • 120 Volt

Uses Two F17T8 Lamps*

BB203-CH-WH-2-F32T8-120V • 92811

Chrome Body • White Lens

48" (L) • 3.25" (W) • 5.25" (D) • 120 Volt

Uses Two F32T8 Lamps*

FEATURES AND BENEFITS


- Can be mounted vertically or horizontally
- Individual or continuous row mounting
- White opal acrylic wraparound diffuser
 - Post chrome plated steel housing or white enamel finish

ADDITIONAL OPTIONS

- Emergency battery backup
- Grounded convenience outlet

APPLICATIONS

Decorative one light chrome or white fixtures, are suitable for wall or ceiling mounting. Designed for bathrooms, kitchens, vanities, bulletin boards, recreation rooms and above or alongside mirrors.

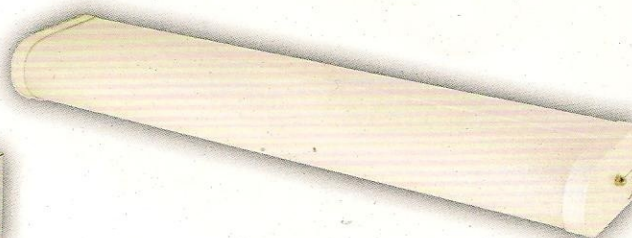

DECORATIVE BRACKET

BB102-WH-WH-1-F17T8-120V • 92830

White Body • White Lens

24" (L) • 2.625" (W) • 4.25" (D) • 120 Volt

Uses One F17T8 Lamp*

BB102-WH-WH-1-F32T8-120V • 92832

White Body • White Lens

48" (L) • 2.625" (W) • 4.25" (D) • 120 Volt

Uses One F32T8 Lamp*

BB102-CH-WH-1-F17T8-120V • 92833

Chrome Body • White Lens

24" (L) • 2.625" (W) • 4.25" (D) • 120 Volt

Uses One F17T8 Lamp*

BB102-CH-WH-1-F32T8-120V • 92835

Chrome Body • White Lens

48" (L) • 2.625" (W) • 4.25" (D) • 120 Volt

Uses One F32T8 Lamp*



COMMERCIAL FIXTURES

VT & VTS SERIES

APPLICATIONS

For use in indoor applications such as bathrooms, stairwells, hallways, kitchens, vanities, bulletin boards, recreation rooms and alongside mirrors and other areas requiring a multi-purpose fixture.

ADDITIONAL OPTIONS

- Emergency battery backup
- Grounded convenience outlet
- Motion sensor

VANDAL PROOF BRACKET

VP213-WH-CL-2-F17T8-120V • 92754

White Body • Clear Lens

24" (L) • 4.25" (W) • 4.375" (D) • 120 Volt
Uses Two F17T8 Lamps*

VP213-WH-CL-2-F32T8-120V • 92756

White Body • Clear Lens

48" (L) • 4.25" (W) • 4.375" (D) • 120 Volt
Uses Two F32T8 Lamps*

COMMERCIAL GRADE BRACKET

BB213-WH-WH-2-F17T8-120V • 92773

White Body • White Lens

24" (L) • 4.25" (W) • 4.375" (D) • 120 Volt
Uses Two F17T8 Lamps*

BB213-WH-WH-2-F32T8-120V • 92775

White Body • White Lens

48" (L) • 4.25" (W) • 4.375" (D) • 120 Volt
Uses Two F32T8 Lamps*

BB213-WH-CL-2-F17T8-120V • 92779

White Body • Clear Lens

24" (L) • 4.25" (W) • 4.375" (D) • 120 Volt
Uses Two F17T8 Lamps*

BB213-WH-CL-2-F32T8-120V • 92781

White Body • Clear Lens

48" (L) • 4.25" (W) • 4.375" (D) • 120 Volt
Uses Two F32T8 Lamps*

DECORATIVE SLIM BRACKET

BB104-WH-WH-1-F17T8-120V • 92850

White Body • White Lens

24" (L) • 2.7" (W) • 4.25" (D) • 120 Volt
Uses One F17T8 Lamp*

BB104-WH-WH-1-F32T8-120V • 92852

White Body • White Lens

48" (L) • 2.7" (W) • 4.25" (D) • 120 Volt
Uses One F32T8 Lamp*