


# 3-WAY & LONG LIFE Incandescent A-Type



3 Way

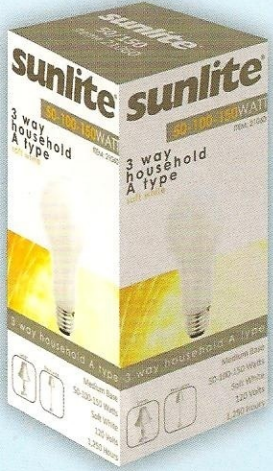

A19

### 3-WAY BULB

- Available as 30-70-100 or 50-100-150 watt
- White finish
- 120 volt

### LONG LIFE BULB

- 5,000 Hours
- Brass base
- Frost finish
- 130 volt

## 3 WAY >>

Item #	Description	Bulb Type	Base	Finish	Watts	Volts	Lumens	Hours	MOL	Pkg.
21050	30/100	3 Way	Medium	White	30-70-100	120	250-750-1050	2,000	5.08	12
21060	50/150	3 Way	Medium	White	50-100-150	120	500-1500-2000	2,000	5.08	12

## 2 PACK - LONG LIFE >>


Item #	Description	Bulb Type	Base	Finish	Watts	Volts	Lumens	Hours	MOL	Pkg.
01005	40A/FR/LL/2PK	A19	Medium	Frost	40	130	300	5,000	4.06	120
01010	60A/FR/LL/2PK	A19	Medium	Frost	60	130	500	5,000	4.06	120
01015	75A/FR/LL/2PK	A19	Medium	Frost	75	130	650	5,000	4.06	120
01020	100A/FR/LL/2PK	A19	Medium	Frost	100	130	1000	5,000	4.06	120



# APPLIANCE BULBS


## A15 and High Intensity

INCANDESCENT

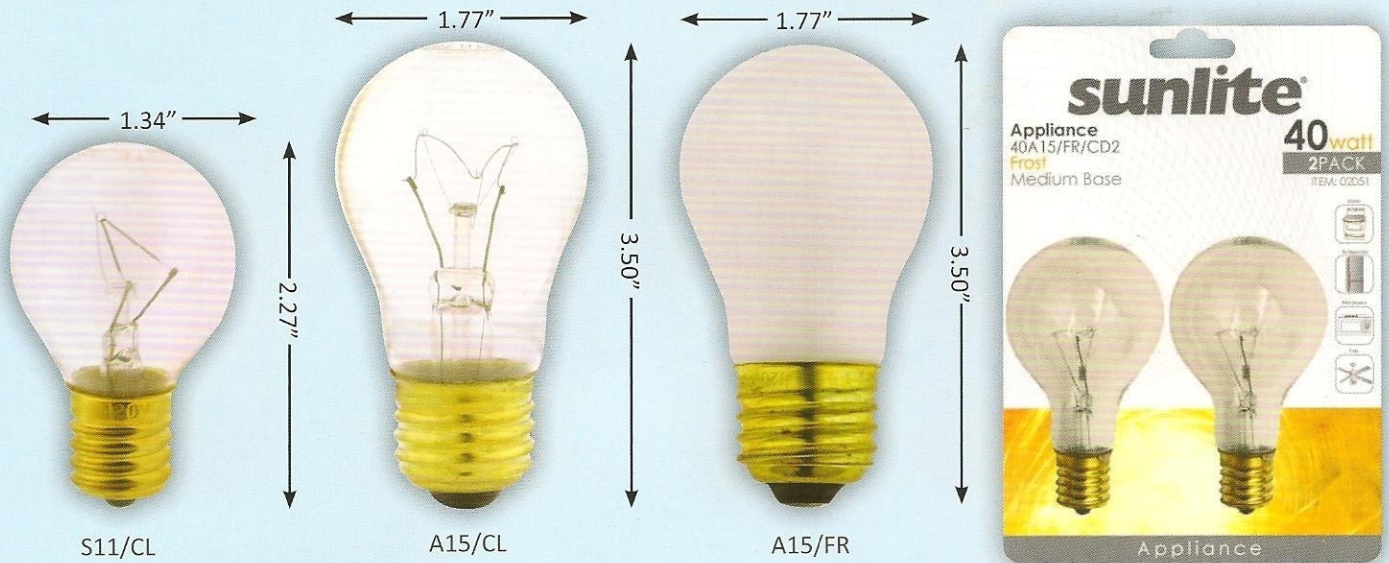

### APPLIANCE BULBS

- Available in clear or frost.
- 15, 40 or 60 watt
- Perfect for ovens, refrigerators and ceiling fans.
- Available in Tuff Skin (page 84)



### A15 >>

Item #	Description	Bulb Type	Base	Finish	Watts	Volts	Lumens	Hours	MOL	Pkg.
02030	15A15/FR	A15	Medium	Frost	15	120	100	2,500	3.50	12/120
02035	15A15/CL	A15	Medium	Clear	15	120	105	2,500	3.50	12/120
02040	40A15/FR	A15	Medium	Frost	40	120	304	2,000	3.50	12/120
02045	40A15/CL	A15	Medium	Clear	40	120	320	2,500	3.50	12/120
02050	40A15/FR/CD1	A15	Medium	Frost	40	120	304	2,500	3.50	12/120
02055	40A15/CL/CD1	A15	Medium	Clear	40	120	320	2,000	3.50	12/120
02051	40A15/N/FR/CD2	A15	Intermediate	Frost	40	120	304	2,500	3.50	12/120
02056	40A15/N/CL/CD2	A15	Intermediate	Clear	40	120	320	2,000	3.50	12/120
02090	60A15/CL/CD1	A15	Medium	Clear	60	130	550	2,500	3.50	12/120
02095	60A15/FR/CD1	A15	Medium	Frost	60	130	530	2,500	3.50	12/120
02091	60A15/N/CL/CD2	A15	Intermediate	Clear	60	130	550	2,500	3.50	12/120
02092	60A15/N/FR/CD2	A15	Intermediate	Frost	60	130	530	2,500	3.50	12/120

### S11 >>

Item #	Description	Bulb Type	Base	Finish	Watts	Volts	Lumens	Hours	MOL	Pkg.
01605	40S11/N/CL/CD1	S11	Intermediate	Clear	40	120	300	2,000	2.27	12/240
01608	40S11/N/CL	S11	Intermediate	Clear	40	120	300	2,000	2.27	25/500

CD - Carded