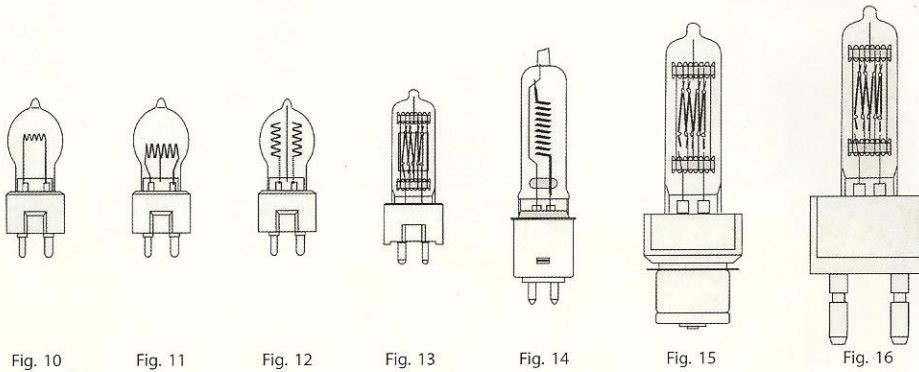
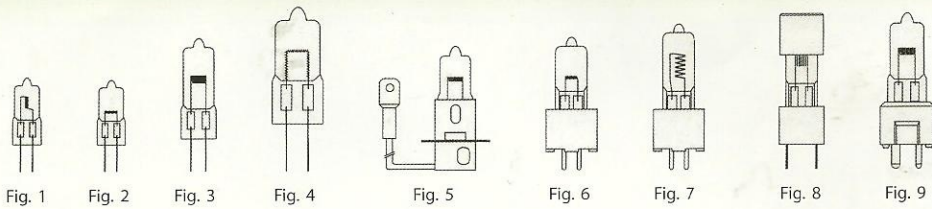


Fig. 38 Fig. 39 Fig. 40 Fig. 41

Fig. 42 Fig. 43 Fig. 44

Fig. 45 Fig. 46 Fig. 47


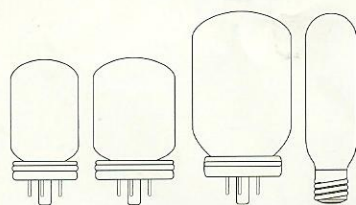


Fig. 48 Fig. 49 Fig. 50 Fig. 51

Fig. 52 Fig. 53

STAGE & STUDIO

BLC - DFG

SPECIALTY

Ansi Code	Item #	Volts	Watts	Bulb	Base	Rated Life	Coil Type	L.C.L. (mm)	M.O.L. (mm)	Lumens	Color Temp. (K)	Oppt Position	Fig. #
BLC	70101	115-125	30	S11	DCBAYN	50	CC-V2		61	400	2775		44
BLX		120	50	S11	DCBAYN	50	CC2V		61	780	2850		44
BMV	70103	112-120	100	S11	SCBAYN	50	CC13			1860	2950		43
BNF	70104	115-125	75	S11	DCBAYN	25	CC2V		61	1300	2950		44
BRL/BCD	70000	12	50	T3	GY6.35	50	C13D		44	1400	2900		3
BTL	70005	120	500	T6	P28s	500	C13D		127	11000	3400		52
BTN	70300	120	750	T7	P28s	500	C13D		120	17600	3050		52
BTP	70007	120	750	T7	P28s	200	C13D		120	21000	3200		52
BTR	70505	120	1000	T7	P28s	250	C13D		120	28500	3200		9
BVE	70008	120	625	T6	GX9.5	75	C13D		89		3200		52
BVK/BVS	70009	5	62.5	T8	SCPREF	50	C-8		78	550	2950		
BVW	70011	120	2000	T10	P40s	350	C13		216	59000	3200		
BVT	70012	120	2000	T7	P40s	500	C13D		184	24500	3050		
BWA	70013	120	2000	T8	G38	500	CC8		209	54000	3200		16
CAL/CXP		120	300	T10	G17Q	25	C13		102		3200		34
CAR		120	150	T10	G17Q	15	2CC8		80		3100		36
CBA	71001	120	500	T6	G17Q	50	C13D		92		3250		32
CBJ/CBC		115-125	75	T8	SCBAYN	50	CC13		79	1250	2950		43
CBX/CBS		115-125	75	T8	DCBAYN	50	CC13		3.13	1200	2925		44
CEB		118	100	T8	DCBAYN	50	CC13		3.13	1850	2975		44
CEM/BFB	71003	120	120	T8	SCBAYN	200	CC8		3.13	1950	3000		43
CEW/CFC		120	150	T8	SCBAYN	25	2CC8		92	3500	3000		43
CLS/CLG		120	300	T8	SCBAYN	25	C13		105	7600	3200		43
CRT		120	300	T10	G17Q	500	C13D		103		2900		34
CTT/DAX		115-125	1000	T12	G17Q	25	C13D		117		3250		34
CWA		115-125	750	T12	G17Q	25	C13D		117		3200		34
CXK		120	300	T10	PREF	25	C13		146	7500	3200		41
CXL/CXR		8	50	TB-6	SCBAYN	25	C6		96		3200		43
CYC/CYM		120	300	T10	SCBAYN	25	C13		81	7400	3200		43
CYS/DBH		115-125	1200	T12	G17Q	10					3200		34
CYX	70014	120	2000	T10	G-38	350	C13		216	59000	3200		53
CZA/CZB		120	500	T10	G17Q	25	C13D		102		3300		37
CZX/DAB		120	500	T10	PREF	25	C13D		146	12500	3200		38
DAH		120	500	T12	G17Q	200	C13D		101		3000		36
DAK/DAT/DAY		120	500	T10	G17Q	25	C13D		102	12500	3200		34
DCH/DFP/DJA		120	150	T12	G17Q	15	CC6		86		3150		48
DDL	70010	20	150	MR16	GX5.3	500	CC6		44		3150		28
DDM	70016	19	80	MR16	GX5.3	50	CC6		44		3350		19
DDN	70018	20	200	T3	RSC	100	CC8		61	5000	3150		18
DDY		120	750	T12	PREF	200	C13D		146	17000	2950		39
DDS	70280	21	80	MR16	GX5.3	1000	CC-6		44		3125		28
DED	70015	13.8	85	MR16	GX5.3	1000	C-6		44		3150		28
DFG		120	150	T12	G17Q	15	CC-6		90		3150		36

Ansi Code	Item #	Volts	Watts	Bulb	Base	Rated Life	Coil Type	L.C.L. (mm)	M.O.L. (mm)	Lumens	Color Temp. (K)	Opri Position	Fig. #
DFE		30	80	T12	GX17Q	15	CC-8		81		3400		48
DFK		120-125	1000	T12	INDRING						3150		38
DFN/DFC		120-125	150	T12	G17Q	15	CC-8		81		3150		48
DFY		120	1000	T12	INDRING	25	C13D		145	28000	3250		38
DJL		120	150	T14	G17Q	15	CC-8		89		3150		50
DJT	70021	13.8	50	MR16	GX5.3	1000	CC-6		44.5		3150	BDTH	28
DKZ/DSE		120	1000	PS52/4	E39	750	CC-8		13	28000	3200		
DLD/DFZ		30	80	T14	GX17q	15	CC-6	39.7	89		3400	BD	49
DLG/DLS/DHX		21.5	150	T14	GX17q	10	CC-6	39.7	89		3250	BDTH	31
DLH	70017	120	250	T14	G17Q	15	CC-6				3200		15
DMX	70019	120	500	T20	P28s	50	C-13	55.6	146.1	13200	3200	BD	40
DNE	70020	120	150	TB16	GX7.9	12	CC-8		50		3350		30
DNF	70025	21	150	MR16	GX7.9	25	CC-6	15.9	45.1		3400	HORIZ	30
DNS/FMC		120	500	T12	P28s	200	C-13D	88.9	155.5	11000	3000	BU	15
DNT/FMD		120	750	T12	P28s	200	C-13D	88.9	155.5	17000	3050	BU	15
DNW		120	500	T20	P28s	5000	C-13	55.6	146.1	10000	2900	BDTH	15
DRA	70030	120	300	T4	G6.35	300	CC-6	33	50	6900	3100	BDTH	2
DRS	70032	120	1000	T20	P28s	25	C-13D	55.6	146.1	29000	3300	BD	41
DRW		120	1000	T20	E39	25	C-13D	120.7	230.2	27400	3325	BD	51
DTA	70033	120	1500	T8	P40s	100	C-13D	87.3	203.2	39000	3200	ANY	
DTJ	70034	120	1500	T20	P40s	25	C-13D	87.3	241.3	42500	3225	BD	
DWE		120	650	PAR36	SCREW	100		2.75			3200		
DWY/FAB	70036	120	650	T4	R7s	25	CC-8		80.6	20000	3400	ANY	19
DXM	70037	30	250	T3.5									18
DXN	70038	120	1000	T5	R7s	30	CC-8		95.3	33000	3400	ANY	19
DXW	70039	120	1000	T5	R7C	100	CC-8	3.75	95.3	28000	3200	ANY	19
DXX	70042	240	800	T4	R7s	75	CC-8		80.6	20500	3200	ANY	19
DYG	70035	30	250	G7	GZ9.5	15	CC-6	36.6	63.5	7000	3400		10
DYH	70043	120	600	G7	G5.3	75	CC-6	36.56	63.5	17000	3200	ANY	35
DYS/DYV/BHC	70040	120	600	G7	GZ9.5	75	CC-6	36.5	63.5	17000	3200	HORIZ	11
DZE/FDS	70045	24	150	T4	GZ9.5	50	C-6F	33.4	57	5000	3400	BD	9
EFM	70050	8	50	MR16	GZ6.35	50	C-6		42		3300	BDTH	27
EFN	70055	12	75	MR16	GZ6.35	50	C-8		42		3350	BDTH	27
EFP	70060	12	100	MR16	GZ6.35	50	C-8		42		3350	BDTH	27
EFR	70065	15	150	MR16	GZ6.35	50	C-8		42		3350	BDTH	27
EGT	70070	120	1000	T7	G22	250	C-13D	63.5	140	28500	3200	CLEAR	16
EGW	70260	120	650	T7	GX6.35	15		30	57	20000	3400	VBD	4
EHA	70075	120	500	T6	GZ9.5	50	C-13D	36.5	76.2	11000	3250	ANY	13
EHC/EHB	70076	120	500	T4	G9.5	300	CC-8	60.3	95.3	13000	3200	ANY	14
EHD	70080	120	500	T4	G9.5	2000	CC-8	60.3	95.3	10600	3000	CLEAR	14
EHF	70082	120	750	T6	G9.5	300	CC-8	60.3	104.8	20400	3200	ANY	14
EGE	70071	120	500	T6	P28S	2000	CC-8		88	10450	2950		15
EGF	70072	120	750	T6	P28S	300	CC-8		88	20400	3200		15

STAGE & STUDIO EGG - EYS

SPECIALTY

Ansi Code	Item #	Volts	Watts	Bulb	Base	Rated Life	Coil Type	L.C.L. (mm)	M.O.L. (mm)	Lumens	Color Temp. (K)	Oprt Position	Fig. #
EGG	70073	120	750	T6	P28S	2000	CC-8		88	15750	3000		15
EGK	70074	120	1000	T6	P28S	300	CC-8		88	26500	3200		15
EHG	70083	120	750	T5	G9.5	2000	CC-8	60.3	104.8	15000	3000	ANY	14
EHJ	70085	24	250	T4	G6.35	50	C-6F	33	55	8000	3400	BDTH	3
EHV	70086	120	325	T4	E11	500	CC-8	41.3	80	7800	3000	ANY	51
EJA	70090	21	150	MR16	GX5.3	40	CC-6		44.5		3350		28
EJD	70091	185	1000	T3	RSC	100	C-8		4.7	33600	3350		19
EJG	70092	120	750	T-3	R7s	400	C-8		119.9	20600	3200	HORIZ	19
EJL	70095	24	200	MR16	GX5.3	50	C-8		44.5		3400	BDTH	28
EJM	70100	21	150	MR16	GX5.3	40	CC-6		44.5		3400	BDTH	28
EJV	70105	21	150	MR16	GX5.3	40	CC-6		44.5		3400	BDTH	28
EKB	70108	120	420	G7	GY9.5	75	CC-6		2.5	11000	3200		11
EKD	70109	120	650	G6	GX9.5	25	CC-6		2.5	20000	3300		11
EKE	70110	21	150	MR16	GX5.3	200	CC-6		44.5		3250	BDTH	28
EKZ	70112	10.8	30	MR16	GX5.3	200	CC-6		44.5		3100	BDTH	28
ELB	70115	30	80	MR16	GX5.3	15	CC-6		44.5		3400	BDTH	28
ELC	70125	24	250	MR16	GX5.3	50	C-8		44.5		3400	BDTH	26
ELC-5H	70120	24	250	MR16	GX5.3	500	CC-6		44.5		3400	BDTH	28
ELD/EJM	70121	21	150	MR16	GX5.3	40	CC-6		44.5		3350	BDTH	28
ELH	70130	120	300	MR16	GY5.3	35	CC-8		44.5		3350	BDTH	28
ELZ	70285	21	150	MR16	GX7.9	60	CC-6	15.9	44.1		3350	HORIZ	30
EML	70286	24	175	T4	G5.3	125	C-6	27	57.2	5000	3200	BDTH	3
ENG	70290	120	300	MR16	GY5.3	15	CC-8		44.5		3450	BDTH	28
ENH	70135	120	250	MR16	GY5.3	175	CC-8		44.5		3250	BDTH	28
ENL	70140	12	50	MR16	GX5.3	3000	C-6		44.5		3050		28
ENW/ENC	70141	19	80	MR16	GX5.3	200	CC-6		44.5		3200	BDTH	28
ENX	70145	82	360	MR16	GY5.3	75	CC-8		44.5		3300	BDTH	28
ENZ	70150	30	50	MR16	GX5.3	25	CC-6		44.5		3400	BDTH	28
EPN	70151	12	35	MR16	GX5.3	50	C-6		44.5		3300	BDTH	28
EPV	70295	14.5	90	MR16	GX5.3	500	CC-6		44.5		3150	HD	28
ESA/FHD	70297	6	10	T2.5	G4	100	C-6	19.6	30	200	3200	ANY	2
ESB/FHE	70155	6	20	T3	G4	100	C-6	19.5	31	420	3200	ANY	2
ESD	70160	120	150	MR16	GY5.3	12	CC-8		44.5		3350	HD	28
ESJ	70161	82	85	MR16	GY5.3	40	CC-8		44.5		3350	BDTH	28
ESP	70163	120	150	T4	BA15d	1000	CC-2V	34.9	61.9	2400	2950	ANY	34
ESY	70162	100	150	T4	G6.35	200	CC-6	32	50	3300	3075	BD	4
ETJ	70165	120	250	MR16	GY5.3	175	CC-8		44.5		3250	BDTH	28
EXY	70185	82	250	42 DICH	GX5.3	250	CC-8		44.5		3250	BDTH	29
EYB	70190	82	360	T3.5	G5.3	75	CC-8	31	57	10000	3250	BDTH	7
EYB-5	70192	86	360	T5	G5.3	75	CC-8	31.8	57	10000	3300	BDTH	7
EYH/FKT	70194	120	250	G7	G5.3	200	CC-6	37.5	63	5400	3050	ANY	35
EYR	70197	12	42	MR16	GU5.3	4000	C-8		44.5		3000	BU-BH	28
EYS	70198	12	42	MR16	GU5.3	4000	C-8		44.5		3000	BU-BH	28

Ansi Code	Item #	Volts	Watts	Bulb	Base	Rated Life	Coil Type	L.C.L. (mm)	M.O.L. (mm)	Lumens	Color Temp. (K)	Oprt Position	Fig. #
EZK/JCR	70195	120	150	MR16	GY5.3	200	CC-8		44.5		3200		28
FAD	70200	110	650	T4	R7s	100	CC-8	15.7	80.8	16500	3200		18
FBX	70201	120	650	T4	RSC	400	CC-8		142	16500	3200		
FCA	70199	120	650	T4	R7s	25	CC-8		80.6	19000	3400	ANY	18
FCB	70202	120	600	T4	R7s	75	CC-8		95.3	16500	3200	ANY	18
FCL	70203	120	500	T-3	R7s	2000	C-8		119.9	13250	3200	HORIZ	19
FCM	70205	120	1000	T3	R7s	400	C-8	65	119.9	28000	3200		17
FCR	70270	12	100	T3	GY6.35	50	C-6F	30	44	3400	3250	BDTH	3
FCS	70210	24	150	T4	G6.35	50	C-6F	30	50.8	6000	3400	BDTH	3
FCV	70213	120	1000	T6	MOGBIN	300	CC-8		104	26500	3200		16
FDB	70211	120	1500	T3	R7s	400	C-8		167.9	40000	3200	HORIZ	19
FDF	70214	120	500	T3	R7s	4000	C-8		119.9	13250	3200	HORIZ	19
FDN	70212	120	500	T3	R7s	400	C-8		119.9	12500	3200	HORIZ	19
FDT	70215	12	100	T3.5	GZ9.6	51	C-6F	27	57	2900	3300	BD	9
FDV	70275	24	150	T5	G6.35	100	C-6F	30	50	4300	3300	BDTH	9
FEL	70220	120	1000	T6	G9.5	300	CC-8	60.3	101.7	27000	3200	CLEAR	14
FEY	70221	120	2000	T8	R7s	400	CC-8		142	57000	3200		19
FGY	70222	20	120	T4	R7s	2000	CC-8	60.2	79	1800	2900		18
FHM	70225	120	1000	T3	R7s	300	C-8		119.9	26000	3200	HORIZ	19
FHS	70230	82	300	MR13	GX5.3	70	CC-8		44.5		3300	BDTH	29
FHS-5	70232	86	300	MR13	GX5.3	70	CC-8		44.5		3300	BDTH	29
FKW	70233	120	300	T8	GY9.5	50	C-13		89	6900	3200		
FLK	70234	115	575	T6	G9.5	300	CC-8		104	12800	3200		
FLT	70238	13.8	25	MR11	GZ4	500	CC-6		38		3100		21
FML	70239	13.8	50	MR16	GU5.3	1000	C-6		44.5		3150		28
FNS	70250	120	300	T5	GX6.35	15		27	57	9500	3400	VBD	4
FTK	70320	120	500	T6	GY9.5	200	CC-6	36.5	62.9	13500	3200	ANY	9
FXL	70235	82	410	MR16	GY5.3	75	CC-8		44.5		3300	BDTH	28
GCA	70236	120	250	T3.5	G5.3	200	CC-8	32	57.2	6000	3200	ANY	3
H3-55	70240	12	55	T3.5	PK22s	225	C-6	19	42	1450	3200	CLEAR	5
H3-70	70245	24	70	T3.6	PK22s	226	CC-6	19	42	1750	3200	CLEAR	5
EVA	70315	12	100	T3.5	GY6.35	1000	C-6F	30	44	2000	3200	ANY	3
EVC/FGX	70170	24	250	T5	G6.35	300	C-6F	33	57	8400	3200	ANY	3
EVD	70265	36	400	T6	G6.35	50	C-6F	36	60	14500	3200	BDTH	3
EVW	70175	82	250	MR16	GY5.3	50	CC-8		44.5		3300	BD-22UP	28
EXR	70180	82	300	MR13	GX5.3	35	CC-8		44.5		3350	BDTH	29



Lamp	Bulb	Base	Volts	Amps	Fig
4ESB	T2	Slide Base 5	24	0.04	23
6	S8	DC Bayonet (BA15d)	6.4	3	16
6MB	T2.5	Miniature Bayonet (BA9s)	6	0.14	10
6PSB	T2	Slide base	6	0.14	23
10	T2.5	Sub-Miniature 2-Pin (G4)	2.5	0.5	1
10CS	T2	Wire Term (SH)	10	0.017	
10ESB	T2	Slide Base 5	10	0.35	
12	T2.5	Sub-Miniature 2-Pin (G4)	6.3	0.15	1
12ESB	T2	Slide Base 5	12	0.04	23
13	T2.5	Miniature Screw (E10)	3.7	0.3	3
14	T2.5	Miniature Screw (E10)	2.47	0.3	3
15	G4.5	Miniature 2-Pin (G5.3)	7	0.4	4
18	T1.75	Sub-Miniature Wedge (W2.1x4.9d)	14	0.04	5
18A	T5	Miniature Wedge (W2.1x9.5d)	12.8	0.547	41
19	T2.5	Sub-Miniature 2-Pin (G4)	14.4	0.1	1
24A	T2.75	Sub-Miniature Wedge (W2x4.6d)	14	0.24	6
24B1	T2	Slide Base 5	24	0.454	23
24C1	T2	Slide Base 1	24	0.072	
24RC	T2	Candelabra (E12)	1.752	0.073	9
24X	T2	Slide Base 2 (TS2)	24	0.35	20
24PC	T2	Cartridge	24	0.73	
27	G4.5	Miniature Screw (E10)	4.9	0.3	8
28MB	T2.5	Miniature Bayonet (BA9s)	28	0.4	10
31	G4.5	Miniature Screw (E10)	6.15	0.3	8
37	T1.75	Sub-Miniature Wedge (W2.1x4.9d)	14	0.09	5
40	T3.25	Miniature Screw (E10)	6.3	0.15	9
41	T3.25	Miniature Screw (E10)	2.5	0.5	9
42	T3.25	Miniature Screw (E10)	3.2	0.35	9
43	T3.25	Miniature Bayonet (BA9s)	2.5	0.5	10
44	T3.25	Miniature Bayonet (BA9s)	6.3	0.25	10
45	T3.25	Miniature Bayonet (BA9s)	3.2	0.35	10
46	T3.25	Miniature Screw (E10)	6.3	0.25	9
47	T3.25	Miniature Bayonet (BA9s)	6.3	0.15	10
48	T3.25	Miniature Screw (E10)	2	0.06	9
48MB	T2.5	Miniature Bayonet (BA9s)	48	0.53	10
49	T3.25	Miniature Bayonet (BA9s)	2	0.06	10
50	T2.5	Miniature Screw (E10)	7.5	0.22	3
51	T2.5	Miniature Bayonet (BA9s)	7.5	0.22	11
52	T2.5	Miniature Screw (E10)	14.4	0.1	3
52A	T2	Slide Base 6	24	0.3	23
53A	T2.5	Miniature Bayonet (BA9s)	14.4	0.12	11

Lamp	Bulb	Base	Volts	Amps	Fig
55	G4.5	Miniature Bayonet (BA9s)	7	0.41	12
55C3	G4.5	Slide Base 5	55	0.06	7
60PSB	T2	Slide Base 5	60	0.05	23
60RC	T2	Candelabra (E12)	60	0.05	9
63	G6	SC Bayonet (BA15s)	7	0.63	11
64	G6	DC Bayonet (BA15d)	7	0.63	16
67	G6	SC Bayonet (BA15s)	13.5	0.59	13
68	G6	DC Bayonet (BA15d)	13.5	0.59	14
70	T1.75	Sub-Miniature Wedge (W2.1x4.9d)	14	0.15	5
72	G6	DC Bayonet (BA15d)	22	0.18	14
73	T1.75	Sub-Miniature Wedge (W2.1x4.9d)	14	0.08	5
74	T1.75	Sub-Miniature Wedge (W2.1x4.9d)	14	0.1	5
79	T1.75	Sub-Miniature Wedge (W2.1x4.9d)	6	0.2	5
81	G6	SC Bayonet (BA15s)	6.5	1.02	13
82	G6	DC Bayonet (BA15d)	6.5	1.02	14
84	T1.75	Sub-Miniature Wedge (W2.1x4.9d)	6.3	0.04	5
85	T1.75	Sub-Miniature Wedge (W2.1x4.9d)	28	0.04	5
86	T1.75	Sub-Miniature Wedge (W2.1x4.9d)	6.3	0.2	5
87	S8	SC Bayonet (BA15s)	6.8	1.91	15
88	S8	DC Bayonet (BA15d)	6.8	1.91	16
89	G6	SC Bayonet (BA15s)	13	0.58	13
89K	G6	Miniature Screw (E10)	13	0.58	8
90	G6	DC Bayonet (BA15d)	13	0.58	14
90MB	T2.5	Miniature Bayonet (BA9s)	90	0.03	10
93	S8	SC Bayonet (BA15s)	12.8	1.04	15
94	S8	DC Bayonet (BA15d)	12.8	1.04	16
96	G6	DC Bayonet (BA15d)	13.5	0.69	14
97	G6	SC Bayonet (BA15s)	13.5	0.69	13
98	G6	SC Bayonet (BA15s)	13	0.62	13
104	B6	DC Bayonet (BA15d)	12.8	1	18
105	B6	SC Bayonet (BA15s)	12.8	1	17
112	T3	Miniature Screw (E10)	1.2	0.25	19
120MB	T2.5	Miniature Bayonet (BA9s)	120	0.025	2
120RC	T12	Candelabra (E12)	120	3.00/0.25	9
123	T2.5	Miniature Screw (E10)	1.25	0.3	3
124	T3.25	Miniature Wedge (W2.1x9.5d)	14	0.27	21
130	T2.5	Miniature Bayonet (BA9s)	6.3	0.15	11
131	T2.5	Miniature Screw (E10)	1.3	0.1	3
147	T3.25	Miniature Wedge (W2.1x9.5d)	7	0.43	21
149	T3.25	Wedge	6.15	0.1	21
158	T3.25	Miniature Wedge (W2.1x9.5d)	14	0.24	21

MINIATURES

159 -407

SPECIALTY

Lamp	Bulb	Base	Volts	Amps	Fig	Lamp	Bulb	Base	Volts	Amps	Fig
159	T3.25	Miniature Wedge (W2.1x9.5d)	6.3	0.15	21	315	S8	SC Bayonet (BA15s)	28	0.9	15
161	T3.25	Miniature Wedge (W2.1x9.5d)	14	0.19	21	323	T1.25	Special	3	0.19	
162	G2	Miniature Screw (E5)	7	0.06	8	324	T1.25	Special	3	0.19	
184	T3.25	Miniature Wedge (W2.1x9.5d)	14	0.35	21	325	T1.25	Special	3	0.19	
192	T3.25	Miniature Wedge (W2.1x9.5d)	13	0.33	21	328	T1.75	Midget Flanged (SX6s)	6	0.2	25
193	T3.25	Miniature Wedge (W2.1x9.5d)	14	0.33	21	330	T1.75	Midget Flanged (SX6s)	14	0.08	25
194	T3.25	Miniature Wedge (W2.1x9.5d)	14	0.27	21	331	T1.75	Midget Flanged (SX6s)	1.35	0.06	25
198	S8	DC Bayonet (BAY15d)	12.8/14	2.25/0.59	22	334	T1.75	Midget Grooved (S5.7s)	28	0.04	27
209	B6	Miniature Bayonet (BA9s)	6.5	1.78	11	335	T1.75	Midget Screw (E5)	28	0.04	28
210	B6	DC Bayonet (BA15d)	6.5	1.78	18	336	T1.75	Midget Grooved (S5.7s)	14	0.08	27
211-2	T3	Double End Cap	12.5	0.97		337	T1.75	Midget Grooved (S5.7s)	6	0.2	27
214-2	T3	Double End Cap	13.5	0.52	24	338	T1.75	Midget Flanged (SX6s)	2.7	0.06	25
219	T2.5	Miniature Bayonet (BA9s)	6.3	0.25	11	342	T1.75	Miniature Screw (E5)	6	0.04	9
222	T3	Miniature Screw (E10)	2.25	0.25	19	344	T1.75	Midget Flanged (SX6s)	10	0.014	25
223	T3.25	Miniature Screw (E10)	2.2	0.25	9	346	T1.75	Midget Grooved (S5.7s)	18	0.04	27
233	T2.5	Miniature Screw (E10)	2.33	0.27	8	349	T1.75	Midget Flanged (SX6s)	6.3	0.2	25
238	T3.25	Miniature Bayonet (BA9s)	6.3	0.5	10	356	T2.5	Miniature Bayonet (BA9s)	14	0.2	11
239	T3.25	Miniature Bayonet (BA9s)	6.3	0.36	10	359	T2.5	Miniature Screw (E10)	1.35	0.06	8
240	T3.25	Miniature Bayonet (BA9s)	6.3	0.36	10	363	T2.5	Miniature Bayonet (BA9s)	14	0.2	11
243	T3	Miniature Screw (E10)	2.33	0.27	19	365	T2.5	Miniature Screw (E10)	3.69	0.5	8
245	T2.5	Miniature Screw (E10)	2.46	0.5	8	367	T1.75	Midget Flanged (SX6s)	10	0.04	25
251	T1.75	Midget Flanged (SX6s)	2.47	0.3	25	368	T1.75	Midget Flanged (SX6s)	2.5	0.2	25
252	TL1.5	Midget Grooved (S5.7s)	2.5	0.35	28	370	T1.75	Midget Flanged (SX6s)	18	0.04	25
256	T3.25	Miniature Bayonet (BA9s)	14	0.27	10	373	T1.75	Midget Screw (E5)	14	0.08	28
257	G4.5	Miniature Bayonet (BA9s)	14	0.27	11	375	T1.75	Midget Flanged (SX6s)	3	0.15	25
258	G4.5	Miniature Screw (E10)	14	0.27	8	376	T1.75	Midget Flanged (SX6s)	28	0.06	25
259	T3.25	Miniature Wedge (W2.1x9.5d)	6.3	0.25	21	377	T1.75	Midget Flanged (SX6s)	6.3	0.075	25
261	T1.75	Midget Grooved (S5.7s)	2.5	0.35	27	378	T1.75	Midget Screw (E5)	6.3	0.2	28
268	T1.75	Midget Flanged (SX6s)	2.5	0.35	25	379	T1.75	Midget Grooved (S5.7s)	6.3	0.2	27
269	T1.75	Midget Flanged (SX6s)	32	0.04	25	380	T1.75	Midget Flanged (SX6s)	6.3	0.04	25
293	G4.5	Miniature Bayonet (BA9s)	14	0.33	12	381	T1.75	Midget Flanged (SX6s)	6.3	0.2	25
301	G-5	SC Bayonet (BA15s)	28	0.17	13	382	T1.75	Midget Flanged (SX6s)	14	0.08	25
303	G6	SC Bayonet (BA15s)	28	0.3	13	385	T1.75	Midget Flanged (SX6s)	28	0.04	25
304	G6	DC Bayonet (BA15d)	28	0.3	14	386	T1.75	Midget Grooved (S5.7s)	14	0.08	27
306	S8	DC Bayonet (BA15d)	28	0.51	16	387	T1.75	Midget Flanged (SX6s)	28	0.04	25
307	S8	SC Bayonet (BA15s)	28	0.67	15	394	T1.75	Midget Flanged (SX6s)	12	0.04	25
308	S8	DC Bayonet (BA15d)	28	0.67	16	397	T1.75	Midget Grooved (S5.7s)	10	0.04	27
309	S11	SC Bayonet (BA15s)	28	0.9	15	398	T1.75	Midget Grooved (S5.7s)	6.3	0.2	28
310	T2	DC Bayonet (BA15d)	28	0.9	53	399	T1.75	Midget Screw (E5)	28	0.04	28
311	S11	SC Bayonet (BA15s)	28	1.29	26	400	T3.25	Miniature Wedge (W2.1x9.5d)	28	0.1	21
313	T3.25	Miniature Bayonet (BA9s)	28	0.17	10	407	G4.5	Miniature Screw (E10)	4.9	0.3	8

Lamp	Bulb	Base	Volts	Amps	Fig
428	G4.5	Miniature Screw (E10)	12.5	0.25	8
431	G4.5	SC Bayonet (BA9s)	14	0.25	11
432	G4.5	Miniature Screw (E10)	18	0.25	8
433	G4.5	SC Bayonet (BA9s)	18	0.25	11
455	G4.5	Miniature Bayonet (BA9s)	6.5	0.5	12
459	T1.75	Midget Flanged (SX6s)	22	0.04	25
464	T3.25	Miniature Wedge (W2.1x9.5d)	28	0.17	21
500	T4.5	Miniature Screw (E10)	9.84	0.5	9
502	G4.5	Miniature Screw (E10)	5.1	0.15	8
503	G4.5	Miniature Bayonet (BA9s)	5.1	0.15	12
509K	G6	SC Bayonet (BA15s)	24	0.18	12
555	T3.25	Miniature Wedge (W2.1x9.5d)	6.3	0.25	21
558	T3.25	Miniature Wedge (W2.1x9.5d)	13	0.33	21
561	T3	Rigid Loop (RGLP)	12.8	0.97	29
562	T3	Rigid Loop (RGLP)	13.5	0.74	29
563	T3	Rigid Loop (RGLP)	13.5	0.52	29
564	T3	Rigid Loop (RGLP)	14	0.44	29
585	T3.25	Miniature Wedge (W2.1x9.5d)	28	0.04	21
605	G4.5	Miniature Screw (E10)	6.15	0.5	8
623	G6	SC Bayonet (BA15s)	28	0.37	13
624	G6	DC Bayonet (BA15d)	28	0.37	14
631	G6	SC Bayonet (BA15s)	14	0.63	13
655	T3.25	Miniature Wedge (W2.1x9.5d)	28	0.2	21
656	T3.25	Miniature Wedge (W2.1x9.5d)	28	0.06	21
657	T3.25	Miniature Wedge (W2.1x9.5d)	28	0.08	21
658	T3.25	Miniature Wedge (W2.1x9.5d)	14	0.08	21
680	T1	Wire Leads (WL)	5	0.06	30
683	T1	Wire Leads (WL)	5	0.06	30
715	T1	Wire Leads (WL)	5	0.115	30
718	T1	Sub-Midget Flanged (SX4s)	5	0.115	10
755	T3.25	Miniature Bayonet (BA9s)	6.3	0.15	10
756	T3.25	Miniature Bayonet (BA9s)	14	0.08	10
757	T3.25	Miniature Bayonet (BA9s)	28	0.08	10
783	T2.75	BiPin (M23)	12	1	40
787	T2.25	Sub-Miniature 2-Pin (G4)	6	1.67	32
788	T2.25	Sub-Miniature 2-Pin (G4)	6	3.33	32
789	T2.75	Sub-Miniature 2-Pin (G4)	12	1.17	31
796	T4	SC Bayonet (BA15s)	12.8	2.7	33
862	T3.25	Right-Angle Prefocus, H27W2	12.8	2.93	
880	T3.25	Axial Prefocus (PG13)	12.8	2.1	34
881	T3.25	Right Angle Prefocus (P22d)	12.8	2.1	35

Lamp	Bulb	Base	Volts	Amps	Fig
882	T2.25	Printed Circuit socket (B10d)	12.8	0.35	36
884	T3.25	Axial Prefocus (PG13)	12.8	2.1	37
885	T3.25	Axial Prefocus (PG13)	12.8	3.9	37
886	T3.25	Right Angle Prefocus (P22d)	12.8	4.17	38
889	T3.25	Right Angle Prefocus (P22d)	12.8	2.1	39
890	T3.25	Axial Prefocus (PG13)	12.8	2.1	40
891	T2.5	Sub-Miniature 2-Pin (G4)	12.8	0.63	41
893	T3.25	Axial Prefocus (PG13)	12.8	2.93	34
894	T3.25	Right Angle Prefocus (P22d)	12.8	2.93	35
895	S8	DC Bayonet (BA15d)	40	0.53	16
896	T3.25	Right Angle Prefocus (P22d)	12.8	2.93	35
904	T5	Miniature Wedge (W2.1x9.5d)	13.5	0.69	41
906	T5	Miniature Wedge (W2.1x9.5d)	13	0.69	41
908	T5	Miniature Wedge (W2.1x9.5d)	6	1.5	41
909	T5	Miniature Wedge (W2.1x9.5d)	6	0.62	41
912	T5	Miniature Wedge (W2.1x9.5d)	12.8	1	41
914	T5	Miniature Wedge (W2.1x9.5d)	4	0.9	41
915	T5	Miniature Wedge (W2.1x9.5d)	12	0.75	41
916	T5	Miniature Wedge (W2.1x9.5d)	13.5	0.54	41
917	T5	Miniature Wedge (W2.1x9.5d)	12	1.2	41
918	T5	Miniature Wedge (W2.1x9.5d)	12.8	0.56	41
921	T5	Miniature Wedge (W2.1x9.5d)	12.8	1.4	41
922	T5	Miniature Wedge (W2.1x9.5d)	12.8	0.98	41
923	T5	Miniature Wedge (W2.1x9.5d)	12.8	0.91	41
927	T5	Miniature Wedge (W2.1x9.5d)	6	1.2	
928	T5	Miniature Wedge (W2.1x9.5d)	28	0.3	41
939	T5	Miniature Wedge (W2.1x9.5d)	6	0.9	41
957	T4.5	Miniature Bayonet (BA9s)	9.84	0.5	10
965	T4.5	Miniature Screw (E10)	9.84	0.5	9
967	T3.25	Miniature Bayonet (BA9s)	120	0.025	10
976	G16.5	DC Bayonet (BA15d)	12	6	12
1003	B6	SC Bayonet (BA15s)	12.8	0.94	17
1004	B6	DC Bayonet (BA15d)	12.8	0.94	18
1016	S8	DC Index Bayonet (BAY15d)	12.8/14	1.34/0.59	22
1019	G16.5	SC Bayonet (BA15s)	12.8	0.5	12
1034	S8	DC Index Bayonet (BAY15d)	12.8/14	1.8/0.59	22
1073	S8	SC Bayonet (BA15s)	12.8	1.8	15
1076	S8	DC Bayonet (BA15d)	12.8	1.8	16
1093	S8	SC Bayonet (BA15s)	12.8	1.19	15
1095	S8	SC Bayonet (BA15s)	14	0.51	15
1096	S8	DC Prefocus S (P30d)	6	4.5	22

MINIATURES

1129 - 1895

SPECIALTY

Lamp	Bulb	Base	Volts	Amps	Fig
1129	S8	SC Bayonet (BA15s)	6.4	2.63	15
1130	S8	DC Bayonet (BA15d)	6.4	2.63	16
1133	RP11	SC Bayonet (BA15s)	6.2	3.91	42
1134	RP11	DC Bayonet (BA15d)	6.2	3.91	44
1139IF	RP11	SC Bayonet (BA15s)	12.8	1.04	42
1141	S8	SC Bayonet (BA15s)	12.8	1.6	15
1142	S8	DC Bayonet (BA15d)	12.8	1.6	16
1143	RP11	SC Bayonet (BA15s)	12.5	1.98	42
1144	RP11	DC Bayonet (BA15d)	12.5	1.98	44
1152	S8	DC Bayonet (BA15d)	12.8	1.34	16
1154	S8	DC Index Bayonet (BAY15d)	6.4/7	2.63/0.75	22
1155	G6	SC Bayonet (BA15s)	13.5	0.59	13
1156	S8	SC Bayonet (BA15s)	12.8	2.1	15
1157	S8	DC Index Bayonet (BAY15d)	12.8/14	2.1/0.59	22
1158	S8	DC Bayonet (BA15d)	6.4/7	2.63/0.75	16
1159	S8	SC Bayonet (BA15s)	12.8	1.6	15
1176	S8	DC Bayonet (BA15d)	12.8/14	1.34/0.59	16
1178	G6	DC Bayonet (BA15d)	13.5	0.69	14
1183	RP11	SC Bayonet (BA15s)	5.5	6.25	42
1184	RP11	DC Bayonet (BA15d)	5.5	6.25	44
1195	RP11	SC Bayonet (BA15s)	12.5	3	42
1196	RP11	DC Bayonet (BA15d)	12.5	3	44
1203	S8	SC Bayonet (BA15s)	28	0.71	15
1204	S8	DC Bayonet (BA15d)	28	0.71	16
1209	RP11	SC Prefocus Flanged	6.1	4	42
1224	G6	DC Bayonet (BA15d)	32	0.16	14
1240	G16.5	DC Prefocus	32	3.6	
1251	G6	SC Bayonet (BA15s)	28	0.23	13
1252	G6	DC Bayonet (BA15d)	28	0.23	14
1309	B6	SC Bayonet (BA15s)	28	0.52	17
1383	R12	SC Bayonet (BA15s)	13	1.5	45
1384	R12	SC Bayonet (BA15s)	6	3.33	45
1385	R12	SC Bayonet (BA15s)	28	0.72	45
1432	T3.25	Miniature Screw (E10)	3.2	0.16	9
1445	T2.5	Miniature Bayonet (BA9s)	14.4	0.135	11
1447	T2.5	Miniature Screw (E10)	18	0.15	8
1449	T2.5	Miniature Screw (E10)	14	0.2	3
1450	T2.5	Miniature Bayonet (BA9s)	24	0.035	10
1476	T3	Miniature Screw (E10)	18	0.17	9
1477	T3	Miniature Screw (E10)	24	0.17	46
1487	T3.25	Miniature Screw (E10)	14	0.2	9

Lamp	Bulb	Base	Volts	Amps	Fig
1488	T3.25	SC Bayonet (BA15s)	14	0.15	10
1490	T3.25	Miniature Bayonet (BA9s)	3.2	0.16	10
1495	T4.5	Miniature Bayonet (BA9s)	28	0.3	47
1630	S8	DC Prefocus S (P30d)	6.5	2.75	43
1651	S8	SC Bayonet (BA15s)	5	0.6	15
1662	S8	DC Index Bayonet (BAY15d)	28	0.93	22
1680	S8	SC Bayonet (BA15s)	6	4.1	15
1683	S8	SC Bayonet (BA15s)	28	1.02	15
1692	S8	DC Bayonet (BA15d)	28	0.61	16
1738	T1.75	Wire Term (SH)	2.7	0.06	
1763	S11	Single Contact Prefocus Flanged	6.1	4.1	48
1767	T1.75	Miniature Screw (E10)	2.5	0.2	9
1810	T3.25	Miniature Bayonet (BA9s)	6.3	0.4	10
1813	T3.25	Miniature Bayonet (BA9s)	14.4	0.1	10
1816	T3.25	Miniature Bayonet (BA9s)	13	0.33	10
1817	T3.25	Miniature Bayonet (BA9s)	13	0.4	10
1818	T3.25	Miniature Bayonet (BA9s)	24	0.17	10
1819	T3.25	Miniature Bayonet (BA9s)	28	0.04	10
1820	T3.25	Miniature Bayonet (BA9s)	28	0.1	10
1821	T3.25	Miniature Screw (E10)	28	0.17	10
1822	T3.25	Miniature Bayonet (BA9s)	36	0.1	10
1823	T3.25	Miniature Screw (E10)	48	0.1	9
1826	T3.25	Miniature Bayonet (BA9s)	18	0.15	10
1828	T3.25	Miniature Bayonet (BA9s)	37.5	0.05	10
1829	T3.25	Miniature Bayonet (BA9s)	28	0.07	10
1832	G4.5	Miniature Bayonet (BA9s)	14	0.27	10
1835	T3.25	Miniature Bayonet (BA9s)	55	0.05	10
1843	T3.25	Miniature Bayonet (BA9s)	28	0.022	10
1847	T3.25	Miniature Bayonet (BA9s)	6.3	0.15	10
1850	T3.25	Miniature Bayonet (BA9s)	5	0.09	10
1855	T4.5	Miniature Bayonet (BA9s)	6.3	0.8	10
1864	T3.25	Miniature Bayonet (BA9s)	28	0.17	10
1866	T3.25	Miniature Bayonet (BA9s)	6.3	0.25	10
1869	T1.75	Wire Leads (WL)	10	0.014	
1873	T3.25	Miniature Bayonet (BA9s)	28	0.2	10
1876	T5	SC Bayonet (BA15s)	3.5	2.5	10
1888	T3.25	Miniature Bayonet (BA9s)	7	0.5	10
1891	T3.25	Miniature Bayonet (BA9s)	14	0.24	10
1892	T3.25	Miniature Bayonet (BA9s)	14.4	0.12	10
1893	T3.25	Miniature Bayonet (BA9s)	14	0.33	10
1895	G4.5	Miniature Bayonet (BA9s)	14	0.27	12

Lamp	Bulb	Base	Volts	Amps	Fig
1939	T7	SC Bayonet (BA9s)	28	1.79	10
2057	S8	DC Index Bayonet (BAY15d)	12.8/14	2.1/0.48	22
2114	T1.25	Wire Leads (WL)	6	0.06	50
2174	T1.75	Wire Leads (WL)	12	0.04	51
2176	T1.75	Wire Leads (WL)	24	0.05	51
2187	T1.75	Wire Leads (WL)	28	0.04	51
3155	S8	Plastic Wedge Sin. Fil.(W2.5x16d)	12.8	1.6	52
3156	S8	Plastic Wedge Sin. Fil. (W2.5x16d)	12.8 2.1		52
3157	S8	Plastic Wedge Sin. Fil.(W2.5x16q)	12.8/14 2.1	0.59	52
5001	B6	SC Bayonet (BA15s)	6	1.66	54
6839	T1	Sub-Midget Flanged (SX4s)	28	0.024	25
7327	T1.75	BiPin (M23)	28	0.04	49
7330	T1.75	BiPin (M23)	14	0.08	49
7335	T1.75	Midget Flanged (SX6s)	5	0.115	25
7349	T1.75	BiPin (M23)	6.3	0.2	49
7382	T1.75	BiPin (M23)	14	0.08	49
7876	T1.75	BiPin (M23)	28	0.06	49
8362	T1.75	Midget Screw	14	0.08	28
8369	T1.75	Midget Screw	28	0.065	28
NE2(A1A)	T2	Wire Term (SH)	105-125		53
NE16(7AA)	T4.5	DC Bayonet (BA15d)	90	0.015	53
NE17(B5A)	T4.5	DC Bayonet(BA15d)			
NE2D(C7A)	T2	Plastic Wedge Single Filament (W2.5x16d)	105-125	0.7	

Lamp	Bulb	Base	Volts	Amps	Fig
NE45(B7A)	T4.5	Candleabra E12	105-125	2	9
NE48(B9A)	T4.5	DC Bayonet (BA15d)	105-125	2	53
NE51(B1A)	T3.25	Miniature Bayonet (BA9s)	105-125	0.3	10
NE51H(B2A)	T3.25	Miniature Bayonet (BA9s)	105-125	1.2	10
NE30(J5A)	S11	Medium Screw (E26)	105-125 12	12	
NE56(J9A)	S11	Medium Screw (E26)	210-250 5	5	55
KPR102	B3.5	SC Miniature Flanged(PX13.5s)	2.4	0.7	55
KPR103	B3.5	SC Miniature Flanged(PX13.5s)	3.6	0.7	55
PR2	B3.5	SC Miniature Flanged (PX13.5s)	1.19	0.5	55
PR3	B3.5	SC Miniature Flanged (PX13.5s)	3.57	0.499	55
PR4	B3.5	SC Miniature Flanged (PX13.5s)	2.33	0.27	55
PR6	B3.5	SC Miniature Flanged (PX13.5s)	2.47	0.3	55
PR7	B3.5	SC Miniature Flanged (PX13.5s)	3.7	0.3	55
PR9	B3.5	SC Miniature Flanged (PX13.5s)	2.7	0.15	55
PR12	B3.5	SC Miniature Flanged (PX13.5s)	5.95	0.501	55
PR13	B3.5	SC Miniature Flanged (PX13.5s)	4.75	0.501	55
PR15	B3.5	SC Miniature Flanged (PX13.5s)	4.82	0.5	55
PR16	B3.5	SC Miniature Flanged (PX13.5s)	12.5	0.25	55
PR17	B3.5	SC Miniature Flanged (PX13.5s)	4.9	0.3	55
PR18	B3.5	SC Miniature Flanged (PX13.5s)	7.2	0.55	55
PR20	B3.5	SC Miniature Flanged (PX13.5s)	8.63	0.501	55
PR30	B3.5	SC Miniature Flanged (PX13.5s)	3.75	0.895	55