


STRAIGHT TUBES

- T5 = 0.625" Diameter
- T8 = 1.00" Diameter
- T12 = 1.5" in Diameter
- Available in Cool White, Warm White & Daylight
- Individual sleeve pack

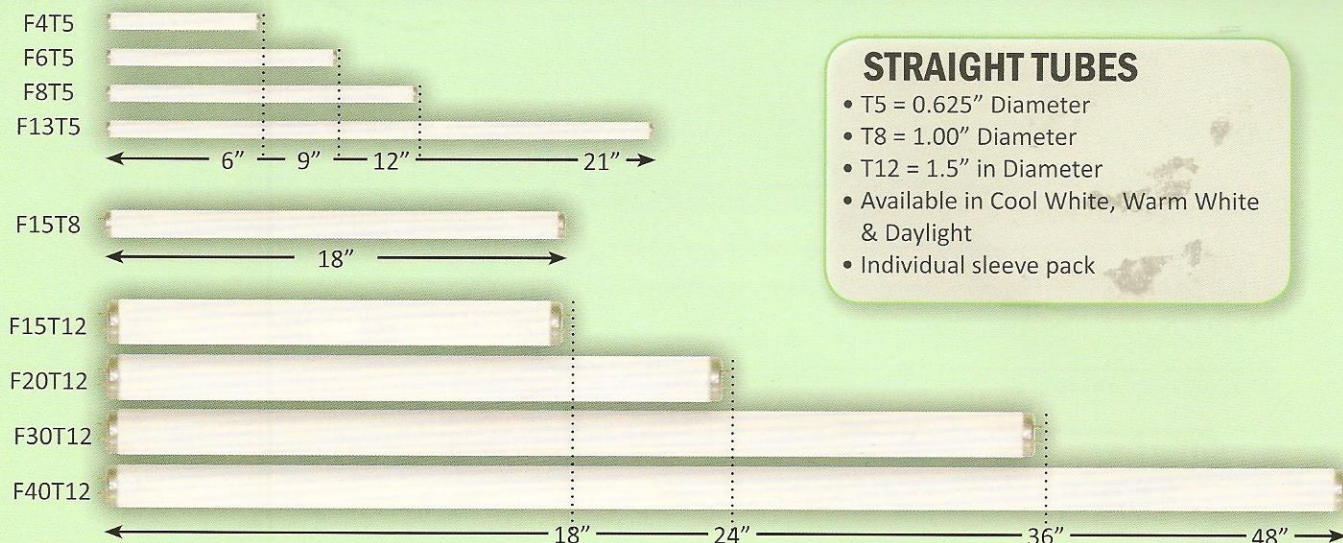

T5 >>

Item #	Description	Base	Watts	Color	Lumens	CRI	Hours	Length	Pkg.
05040	F4T5/CW	Mini Bi Pin	4	Cool White	135	62	6,000	6.00	10/500
05045	F4T5/WW	Mini Bi Pin	4	Warm White	140	62	6,000	6.00	10/500
05050	F6T5/CW	Mini Bi Pin	6	Cool White	240	62	6,000	9.00	10/500
05051	F6T5/DL	Mini Bi Pin	6	Daylight	210	62	6,000	9.00	10/500
05060	F8T5/CW	Mini Bi Pin	8	Cool White	350	62	6,000	12.00	10/200
05061	F8T5/DL	Mini Bi Pin	8	Daylight	310	62	6,000	12.00	10/200
05065	F8T5/WW	Mini Bi Pin	8	Warm White	380	62	6,000	12.00	10/200
05070	F13T5/CW	Mini Bi Pin	13	Cool White	850	82	6,000	21.00	10/200
05071	F13T5/DL	Mini Bi Pin	13	Daylight	750	82	6,000	21.00	10/200
05075	F13T5/WW	Mini Bi Pin	13	Warm White	920	82	6,000	21.00	10/200

T8 >>

Item #	Description	Base	Watts	Color	Lumens	CRI	Hours	Length	Pkg.
05087	F15T8/WW	Medium Bi Pin	15	Warm White	650	75	7,000	18.00	30
05080	F15T8/CW	Medium Bi Pin	15	Cool White	610	62	7,000	18.00	30
05085	F15T8/DL	Medium Bi Pin	15	Daylight	560	62	7,000	18.00	30


T12 >>

Item #	Description	Base	Watts	Color	Lumens	CRI	Hours	Length	Pkg.
30000	F15T12/CW	Medium Bi Pin	15	Cool White	610	62	8,000	18.00	30
30005	F15T12/DL	Medium Bi Pin	15	Daylight	560	62	8,000	18.00	30
30010	F20T12/CW	Medium Bi Pin	20	Cool White	1150	62	8,000	24.00	30
30015	F20T12/DL	Medium Bi Pin	20	Daylight	960	62	8,000	24.00	30
30020	F30T12/CW	Medium Bi Pin	30	Cool White	2050	62	8,000	36.00	30
30025	F30T12/DL	Medium Bi Pin	30	Daylight	1750	62	8,000	36.00	30
30030	F40T12/CW	Medium Bi Pin	34	Cool White	2650	62	8,000	48.00	30
30035	F40T12/DL	Medium Bi Pin	34	Daylight	2400	62	8,000	48.00	30

STRAIGHT TUBES

Blacklight & Germicidal

FLUORESCENT



BLACKLIGHT



BLACKLIGHT BLUE


BLACKLIGHT

- Blacklight & Blacklight Blue
- T5 & T8
- 4, 6, 8 & 15 Watt
- Up to 8000 Hours.


Item #	Description	Base	Watts	Color	Lumens	CRI	Hours	Length	Pkg.
38000	F4T5/BL	Mini Bi Pin	4	Blacklight	N/A	N/A	6,000	6.00	10/500
38010	F6T5/BL	Mini Bi Pin	6	Blacklight	N/A	N/A	6,000	9.00	10/500
38020	F8T5/BL	Mini Bi Pin	8	Blacklight	N/A	N/A	6,000	12.00	10/200
38040	F15T8/BL	Med Bi Pin	15	Blacklight	N/A	N/A	8,000	18.00	30
39000	F4T5/BLB	Mini Bi Pin	4	Blacklight Blue	N/A	N/A	6,000	6.00	10/500
39010	F6T5/BLB	Mini Bi Pin	6	Blacklight Blue	N/A	N/A	6,000	9.00	10/500
39020	F8T5/BLB	Mini Bi Pin	8	Blacklight Blue	N/A	N/A	6,000	12.00	10/200

GERMICIDAL STRAIGHT TUBES


- Used in sterilization, water and air purification.
- Fluorescent lamps have no tint or phosphor on the tube at all.
- Ultraviolet energy is emitted at a maximum wavelength for germicidal effectiveness and is highly lethal to virus, bacteria and mold spores.



G4T5



G6T5



G8T5


Item #	Description	Base	Watts	Color	Lumens	CRI	Hours	Length	Pkg.
37000	G4T5 Germicidal	Mini Bi Pin	4	Germicidal	N/A	80	6,000	6.00	10
37010	G6T5 Germicidal	Mini Bi Pin	6	Germicidal	N/A	80	6,000	9.00	10
37020	G8T5 Germicidal	Mini Bi Pin	8	Germicidal	N/A	80	6,000	12.00	10
37080	G10T8 Germicidal	Med Bi Pin	10	Germicidal	N/A	80	6,000	13.00	10
37030	G15T8 Germicidal	Med Bi Pin	15	Germicidal	N/A	80	6,000	18.00	10
37050	G25T8 Germicidal	Med Bi Pin	25	Germicidal	N/A	80	6,000	17.70	10

T8 - STRAIGHT TUBES


700 & 800 Series

T8 STRAIGHT TUBES


- Low mercury content
- 3000K, 3500K, 4100K, 5000K, 6500K
- Available in 700 & 800 series
- Also Available in Tuff Skin
- Individual sleeve pack



F17T8



F25T8



F32T8

700 SERIES >>

Item #	Description	Base	Watts	Kelvin	Lumens	CRI	Hours	Length	Pkg.
30100	F17T8/SP730	Medium Bi Pin	17	3000K	1350	73	20,000	24.00	30
30110	F17T8/SP735	Medium Bi Pin	17	3500K	1350	73	20,000	24.00	30
30120	F17T8/SP741	Medium Bi Pin	17	4100K	1350	73	20,000	24.00	30
30130	F25T8/SP730	Medium Bi Pin	25	3000K	2150	73	20,000	36.00	30
30140	F25T8/SP735	Medium Bi Pin	25	3500K	2150	73	20,000	36.00	30
30150	F25T8/SP741	Medium Bi Pin	25	4100K	2150	73	20,000	36.00	30
30160	F32T8/SP730	Medium Bi Pin	32	3000K	2850	73	20,000	48.00	30
30170	F32T8/SP735	Medium Bi Pin	32	3500K	2850	73	20,000	48.00	30
30180	F32T8/SP741	Medium Bi Pin	32	4100K	2850	73	20,000	48.00	30
30185	F32T8/SP750	Medium Bi Pin	32	5000K	2850	73	20,000	48.00	30
30190	F32T8/SP765	Medium Bi Pin	32	6500K	2850	73	20,000	48.00	30

800 SERIES >>

Item #	Description	Base	Watts	Kelvin	Lumens	CRI	Hours	Length	Pkg.
30105	F17T8/SP830	Medium Bi Pin	17	3000K	1400	83	20,000	24.00	30
30115	F17T8/SP835	Medium Bi Pin	17	3500K	1450	83	20,000	24.00	30
30125	F17T8/SP841	Medium Bi Pin	17	4100K	1450	83	20,000	24.00	30
30135	F25T8/SP830	Medium Bi Pin	25	3000K	2300	83	20,000	36.00	30
30145	F25T8/SP835	Medium Bi Pin	25	3500K	2300	83	20,000	36.00	30
30155	F25T8/SP841	Medium Bi Pin	25	4100K	2300	83	20,000	36.00	30
30165	F32T8/SP830	Medium Bi Pin	32	3000K	3050	83	20,000	48.00	30
30175	F32T8/SP835	Medium Bi Pin	32	3500K	3050	83	20,000	48.00	30
30195	F32T8/SP841	Medium Bi Pin	32	4100K	3050	83	20,000	48.00	30
30196	F32T8/SP850	Medium Bi Pin	32	5000K	3050	83	20,000	48.00	30

FB31 & FB32 - U BEND 700 & 800 Series

FLUORESCENT



U-BEND

- FB31 - 1 5/8" leg spacing
- FB32 - 6" leg spacing
- Available in 3000K, 3500K, 4100K, 5000K and 6500K
- Low mercury content
- Also Available in Tuff Skin
- Individual sleeve pack

FB31 - 800 SERIES >>

Item #	Description	Base	Watts	Kelvin	Lumens	CRI	Hours	MOL	Pkg.
30265	FB31/SP830	Medium Bi-Pin	31	3000K	2750	83	20,000	22.50	12
30270	FB31/SP835	Medium Bi-Pin	31	3500K	2750	83	20,000	22.50	12
30275	FB31/SP841	Medium Bi-Pin	31	4100K	2750	83	20,000	22.50	12

FB32 - 700 SERIES >>

Item #	Description	Base	Watts	Kelvin	Lumens	CRI	Hours	MOL	Pkg.
30200	FB32/SP730/6	Medium Bi-Pin	32	3000K	2750	73	20,000	22.50	12
30205	FB32/SP735/6	Medium Bi-Pin	32	3500K	2750	73	20,000	22.50	12
30210	FB32/SP741/6	Medium Bi-Pin	32	4100K	2750	73	20,000	22.50	12
30212	FB32/SP750/6	Medium Bi-Pin	32	5000K	2750	73	20,000	22.50	12
30213	FB32/SP765/6	Medium Bi-Pin	32	6500K	2750	73	20,000	22.50	12


FB32 - 800 SERIES >>

Item #	Description	Base	Watts	Kelvin	Lumens	CRI	Hours	MOL	Pkg.
30215	FB32/SP830/6	Medium Bi-Pin	32	3000K	3000	83	20,000	22.50	12
30220	FB32/SP835/6	Medium Bi-Pin	32	3500K	3000	83	20,000	22.50	12
30225	FB32/SP841/6	Medium Bi-Pin	32	4100K	3000	83	20,000	22.50	12
30230	FB32/SP850/6	Medium Bi-Pin	32	5000K	3000	83	20,000	22.50	12
30235	FB32/SP865/6	Medium Bi-Pin	32	6500K	3000	83	20,000	22.50	12




T5 STRAIGHT TUBES


- 14, 21, 28, 24, 35, 39 & 54 watt
- HO = High Output
- 0.625" diameter
- Low mercury content
- Also Available in Tuff Skin
- Individual sleeve pack




F14T5



F21T5



F28T5




F35T5

Item #	Description	Base	Watts	Kelvin	Lumens	CRI	Hours	Length	Pkg.
30300	F14T5/830	Mini Bi Pin	14	3000K	1200	82	20,000	22.20	40
30305	F14T5/835	Mini Bi Pin	14	3500K	1200	82	20,000	22.20	40
30310	F14T5/841	Mini Bi Pin	14	4100K	1200	82	20,000	22.20	40
30312	F14T5/850	Mini Bi Pin	14	5000K	1200	82	20,000	22.20	40
30314	F14T5/865	Mini Bi Pin	14	6500K	1200	82	20,000	22.20	40
30315	F21T5/830	Mini Bi Pin	21	3000K	1900	82	20,000	34.00	40
30320	F21T5/835	Mini Bi Pin	21	3500K	1900	82	20,000	34.00	40
30325	F21T5/841	Mini Bi Pin	21	4100K	1900	82	20,000	34.00	40
30322	F21T5/850	Mini Bi Pin	21	5000K	1900	82	20,000	34.00	40
30324	F21T5/865	Mini Bi Pin	21	6500K	1900	82	20,000	34.00	40
30330	F28T5/830	Mini Bi Pin	28	3000K	2500	82	20,000	45.80	40
30335	F28T5/835	Mini Bi Pin	28	3500K	2500	82	20,000	45.80	40
30340	F28T5/841	Mini Bi Pin	28	4100K	2500	82	20,000	45.80	40
30342	F28T5/850	Mini Bi Pin	28	5000K	2500	82	20,000	45.80	40
30345	F28T5/865	Mini Bi Pin	28	6500K	2500	82	20,000	45.80	40
30385	F35T5/830	Mini Bi Pin	35	3000K	3100	82	20,000	57.60	40
30387	F35T5/835	Mini Bi Pin	35	3500K	3100	82	20,000	57.60	40
30390	F35T5/841	Mini Bi Pin	35	4100K	3100	82	20,000	57.60	40
30392	F35T5/850	Mini Bi Pin	35	5000K	3100	82	20,000	57.60	40
30395	F35T5/865	Mini Bi Pin	35	6500K	3100	82	20,000	57.60	40


T5 - STRAIGHT TUBES

800 Series


FLUORESCENT



F24T5



F39T5



F54T5



Item #	Description	Base	Watts	Kelvin	Lumens	CRI	Hours	Length	Pkg.
30400	F24T5/830/HO	Mini Bi Pin	24	3000K	1800	82	20,000	22.20	40
30405	F24T5/835/HO	Mini Bi Pin	24	3500K	1800	82	20,000	22.20	40
30410	F24T5/841/HO	Mini Bi Pin	24	4100K	1800	82	20,000	22.20	40
30412	F24T5/850/HO	Mini Bi Pin	24	5000K	1800	82	20,000	22.20	40
30414	F24T5/865/HO	Mini Bi Pin	24	6500K	1800	82	20,000	22.20	40
30415	F39T5/830/HO	Mini Bi Pin	39	3000K	3100	82	20,000	34.00	40
30420	F39T5/835/HO	Mini Bi Pin	39	3500K	3100	82	20,000	34.00	40
30425	F39T5/841/HO	Mini Bi Pin	39	4100K	3100	82	20,000	34.00	40
30427	F39T5/850/HO	Mini Bi Pin	39	5000K	3100	82	20,000	34.00	40
30429	F39T5/865/HO	Mini Bi Pin	39	6500K	3100	82	20,000	34.00	40
30430	F54T5/830/HO	Mini Bi Pin	54	3000K	5000	82	20,000	45.80	40
30435	F54T5/835/HO	Mini Bi Pin	54	3500K	5000	82	20,000	45.80	40
30440	F54T5/841/HO	Mini Bi Pin	54	4100K	5000	82	20,000	45.80	40
30445	F54T5/850/HO	Mini Bi Pin	54	5000K	5000	82	20,000	45.80	40
30450	F54T5/865/HO	Mini Bi Pin	54	6500K	5000	82	20,000	45.80	40

COLORED T5 TUBES

- HO = High Output
- 45.8" long, .625" diameter
- Low mercury content
- Also Available in Tuff Skin
- Individual sleeve pack



GREEN



BLUE



RED

Item #	Description	Base	Watts	Color	Lumens	CRI	Hours	Length	Pkg.
30350	F28T5/BLUE	Mini Bi-Pin	28	Blue	700	N/A	20,000	45.80	40
30355	F28T5/GREEN	Mini Bi-Pin	28	Green	3500	N/A	20,000	45.80	40
30360	F28T5/RED	Mini Bi-Pin	28	Red	2100	N/A	20,000	45.80	40
30370	F54T5/BLUE/HO	Mini Bi-Pin	54	Blue	1150	N/A	20,000	45.80	40
30375	F54T5/GREEN/HO	Mini Bi-Pin	54	Green	5500	N/A	20,000	45.80	40
30380	F54T5/RED/HO	Mini Bi-Pin	54	Red	3300	N/A	20,000	45.80	40



CIRCLINE

- Available in Warm White, Cool White and Daylight colors
- 4 Pin Base
- Low mercury content
- Also Available in Tuff Skin




Item #	Description	Base	Watts	Color	Lumens	CRI	Hours	Dia.	Pkg.
05009	FC6T9/CW	4 Pin	20	Cool White	1050	62	10,000	6.00	12
05010	FC8T9/WW	4 Pin	22	Warm White	1250	62	10,000	8.00	12
05015	FC8T9/CW	4 Pin	22	Cool White	1250	62	10,000	8.00	12
05020	FC8T9/DL	4 Pin	22	Daylight	1050	62	10,000	8.00	12
05025	FC12T9/WW	4 Pin	32	Warm White	2100	62	10,000	12.00	12
05030	FC12T9/CW	4 Pin	32	Cool White	2100	62	10,000	12.00	12
05035	FC12T9/DL	4 Pin	32	Daylight	1750	62	10,000	12.00	12
05023	FC16T9/WW	4 Pin	40	Warm White	2600	62	10,000	16.00	12
05021	FC16T9/CW	4 Pin	40	Cool White	2600	62	10,000	16.00	12
05037	FCL30/30K	4 Pin	30	Warm White	2050	80	10,000	9.00	12
05038	FCL30/50K	4 Pin	30	Super White	1800	80	10,000	9.00	12

FC - CIRCLINE & 2C CIRCLINE

T5 Circline & Double Circline

FLUORESCENT

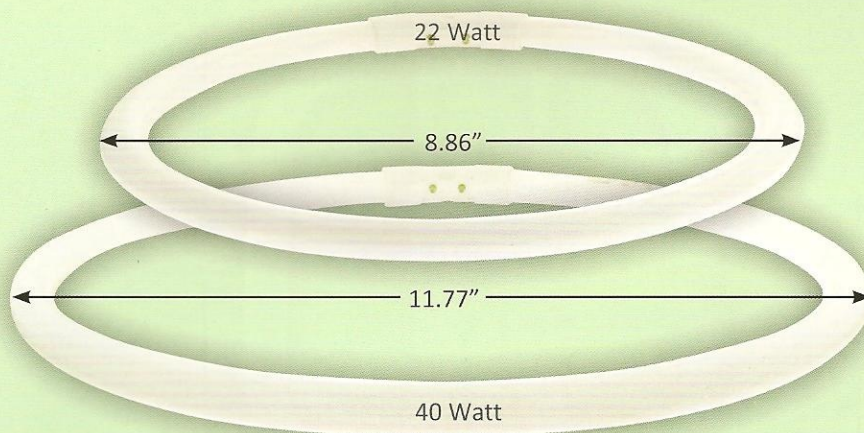

T5 CIRCLINE


- Available in 22 & 40 watt
- Available in 3 Kelvin temperatures
- 82 CRI



Item #	Description	Base	Watts	Color	Lumens	CRI	Hours	Dia.	Pkg.
05800	FC22T5/SP830	2GX13	22	3000K	1900	82	10,000	8.86	12
05805	FC22T5/SP835	2GX13	22	3500K	1900	82	10,000	8.86	12
05810	FC22T5/SP841	2GX13	22	4100K	1900	82	10,000	8.86	12
05815	FC40T5/SP830	2GX13	40	3000K	3350	82	10,000	11.77	12
05820	FC40T5/SP835	2GX13	40	3500K	3350	82	10,000	11.77	12
05825	FC40T5/SP841	2GX13	40	4100K	3350	82	10,000	11.77	12

DOUBLE TUBE CIRCLINE


- 40 watt
- Available in 3000K and 4100K colors
- 82 CRI

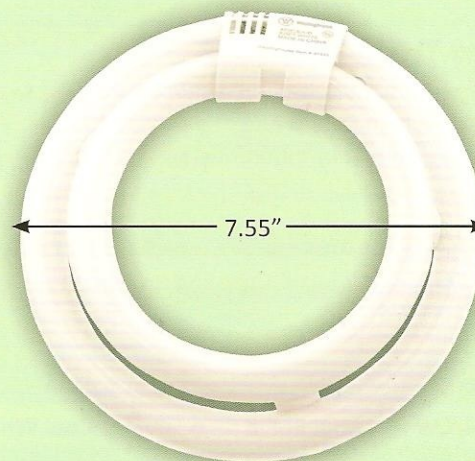

Item #	Description	Base	Watts	Kelvin	Lumens	CRI	Hours	Dia.	Pkg.
05740	FC40/2C/30K	GU10q	40	3000K	2800	82	10,000	7.55	12
05745	FC40/2C/41K	GU10q	40	4100K	2800	82	10,000	7.55	12

2D & T4 TUBES

2D & T4

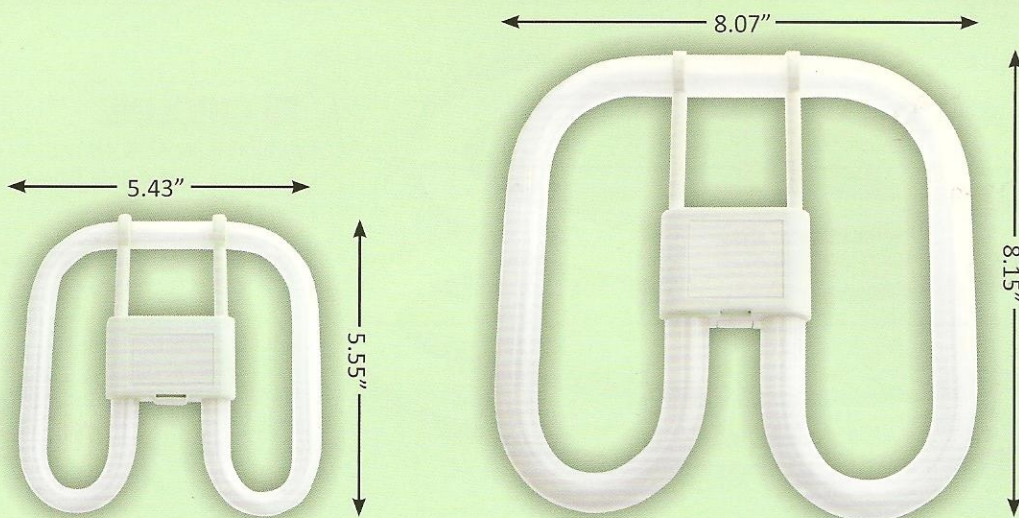

Item #	Description	Base	Watts	Kelvin	Lumens	CRI	Hours	MOL	Pkg.
05720	F16/2D/827/4P	GR10q	16	2700K	1050	82	10,000	5.55	12/24
05725	F16/2D/835/4P	GR10q	16	3500K	1050	82	10,000	5.55	12/24
05730	F21/2D/827/4P	GR10q	21	2700K	1300	82	10,000	5.55	12/24
05735	F21/2D/835/4P	GR10q	21	3500K	1300	82	10,000	5.55	12/24
05700	F28/2D/827/4P	GR10q	28	2700K	1900	82	10,000	8.15	12/24
05705	F28/2D/835/4P	GR10q	28	3500K	1900	82	10,000	8.15	12/24
05710	F38/2D/827/4P	GR10q	38	2700K	2400	82	10,000	8.15	12/24
05715	F38/2D/835/4P	GR10q	38	3500K	2400	82	10,000	8.15	12/24

T4 TUBE

- Replacement bulb for linkable fluorescent fixtures (Page 184)
- Available in Cool White and Daylight
- Available in four different sizes




Item #	Description	Base	Watts	Color	Lumens	CRI	Hours	Length	Pkg.
32000	F6T4/CW	Mini Bi-Pin	6	Cool White	260	82	10,000	9.13	10/200
32010	F6T4/DL	Mini Bi-Pin	6	Daylight	260	82	10,000	9.13	10/200
32020	F10T4/CW	Mini Bi-Pin	10	Cool White	470	82	10,000	13.88	10/200
32030	F10T4/DL	Mini Bi-Pin	10	Daylight	460	82	10,000	13.88	10/200
32040	F16T4/CW	Mini Bi-Pin	16	Cool White	1000	82	10,000	18.88	10/200
32050	F16T4/DL	Mini Bi-Pin	16	Daylight	960	82	10,000	18.88	10/200
32060	F20T4/CW	Mini Bi-Pin	20	Cool White	1280	82	10,000	22.75	10/200
32070	F20T4/DL	Mini Bi-Pin	20	Daylight	1200	82	10,000	22.75	10/200

T10 & T12 HIGH OUTPUT Specialty Sign

FLUORESCENT

F40T10

- Medium Bi-Pin
- 4100K & 5000K
- 62 CRI




T10


Item #	Description	Base	Watts	Kelvin	Lumens	CRI	Hours	Length	Pkg.
30040	F40T10/SP41	Med Bi-Pin	40	4100K	2650	62	10,000	48.00	30
30045	F40T10/SP50	Med Bi-Pin	40	5000K	2650	62	10,000	48.00	30

SIGN T12's


- High output
- Made for outdoor use



F108



F117



F120

Item #	Description	Base	Watts	Color	Lumens	CRI	Hours	MOL	Pkg.
13740	F108T12/CW/HO	RDC	124	Cool White	10350	62	12,000	108.00	10
13750	F108T12/D/HO	RDC	124	Daylight	8800	76	12,000	108.00	10
13760	F117T12/CW/HO	RDC	132	Cool White	11200	62	12,000	117.00	10
13770	F117T12/D/HO	RDC	132	Daylight	9500	76	12,000	117.00	10
13780	F120T12/CW/HO	RDC	135	Cool White	11500	62	12,000	120.00	10
13790	F120T12/D/HO	RDC	135	Daylight	9750	72	12,000	120.00	10

T12 - COLORED Straight Tubes

F20 >>

Item #	Description	Base	Watts	Color	Lumens	Hours	Length	Pkg.
30500	F20T12/B	Med Bi-Pin	20	Blue	450	9,000	24.00	30
30515	F20T12/GO	Med Bi-Pin	20	Gold	840	9,000	24.00	30
30510	F20T12/G	Med Bi-Pin	20	Green	1850	9,000	24.00	30
30525	F20T12/P	Med Bi-Pin	20	Pink	450	9,000	24.00	30
30530	F20T12/R	Med Bi-Pin	20	Red	115	9,000	24.00	30
30505	F20T12/DP	Med Bi-Pin	20	Display Pink	770	9,000	24.00	30
30520	F20T12/N	Med Bi-Pin	20	Natural	850	9,000	24.00	30

F30 >>

Item #	Description	Base	Watts	Color	Lumens	Hours	Length	Pkg.
30550	F30T12/DP	Med Bi-Pin	30	Display Pink	1415	18,000	30.00	30
30555	F30T12/N	Med Bi-Pin	30	Natural	1500	18,000	30.00	30

F40 >>

Item #	Description	Base	Watts	Color	Lumens	Hours	Length	Pkg.
30600	F40T12/B	Med Bi-Pin	40	Blue	1800	20,000	48.00	30
30615	F40T12/GO	Med Bi-Pin	40	Gold	1980	20,000	48.00	30
30610	F40T12/G	Med Bi-Pin	40	Green	4100	20,000	48.00	30
30625	F40T12/P	Med Bi-Pin	40	Pink	1160	20,000	48.00	30
30630	F40T12/R	Med Bi-Pin	40	Red	280	20,000	48.00	30
30605	F40T12/DP	Med Bi-Pin	40	Display Pink	1950	20,000	48.00	30

F72 >>

Item #	Description	Base	Watts	Color	Lumens	Hours	Length	Pkg.
30640	F72T12/DP/HO	RES DC	85	Display Pink	4100	12,000	72.00	15
30641	F72T12/DP	Single Pin	55	Display Pink	N/A	12,000	72.00	15
30645	F72T12/N	Single Pin	55	Natural	3100	12,000	72.00	15


F96 >>

Item #	Description	Base	Watts	Color	Lumens	Hours	Length	Pkg.
30650	F96T12/B	Single Pin	75	Blue	2740	12,000	96.00	10
30655	F96T12/GO	Single Pin	75	Gold	4000	12,000	96.00	15
30566	F96T12/GO/HO	RES DC	110	Gold	N/A	12,000	96.00	15
30660	F96T12/G	Single Pin	75	Green	8800	12,000	96.00	10
30675	F96T12/P	Single Pin	75	Pink	2400	12,000	96.00	10
30680	F96T12/R	Single Pin	75	Red	560	12,000	96.00	10
30655	F96T12/DP	Single Pin	75	Display Pink	3880	12,000	96.00	15
30656	F96T12/DP/HO	RES DC	110	Display Pink	N/A	12,000	96.00	15
30670	F96T12/N	Single Pin	75	Natural	4200	12,000	96.00	15


TRUE LITE

Natural Fluorescent Colors


FLUORESCENT



Natural Outdoor Sunlight
(CRI = 100; Kelvin = 5500)



True Lite Fluorescent
(CRI = 92; Kelvin = 5720)

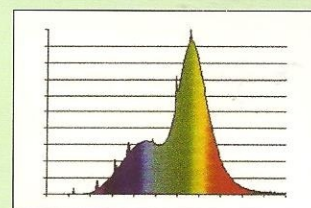

Cool White Fluorescent
(CRI = 62; Kelvin = 4200)

TRUE LITE:

As close as indoor lighting can come to natural outdoor sunlight.

In order to effectively compare artificial light sources, you need to look at each lamp's CRI (Color Rendering Index). Natural outdoor sunlight has a CRI of 100, meaning colors are displayed accurately. Using this natural outdoor sunlight as the standard for all artificial lighting, True Lite is the perfect alternative with the full color spectrum at a CRI of 92!

T8 >>

Item #	Description	Base	Watts	Color	Lumens	CRI	Hours	Length	Pkg.
05083	F15T8/TL	Bi-Pin	15	True Lite	600	92	7500	18.00	30
30127	F17T8TL	Bi-Pin	17	True Lite	735	92	20,000	24.00	30
30157	F25T8TL	Bi-Pin	25	True Lite	1340	92	20,000	36.00	30
30197	F32T8/TL	Bi-Pin	32	True Lite	1960	92	20,000	48.00	30
30198	F96T8/TL	Single Pin	75	True Lite	N/A	92	20,000	96.00	24

T12 >>



Item #	Description	Base	Watts	Color	Lumens	CRI	Hours	Length	Pkg.
30017	F20T12/TL	Bi-Pin	20	True Lite	820	92	9,000	24.00	30
30027	F30T12/TL	Bi-Pin	30	True Lite	1500	92	18,000	36.00	30
30037	F40T12/TL	Bi-Pin	40	True Lite	2200	92	20,000	48.00	30
30050	F48T12/TL	Single Pin	39	True Lite	3000	92	9,000	46.00	30
30051	F48T12/TL/HO	RDC	60	True Lite	3000	92	9,000	46.00	30
30052	F72T12/TL	Single Pin	55	True Lite	3200	92	12,000	72.00	15
30055	F96T12/TL/HO	RDC	110	True Lite	6500	92	12,000	96.00	15
30054	F96T12/TL	Single Pin	75	True Lite	4400	92	12,000	96.00	15

MARKET LITE:


Red lights for a richer, lush tone.

As highlighted in these spectral distribution graphs, the Market Lite Plus “peaks” (produces maximum relative energy output) well into the RED range of the spectrum. Meats look redder and fresher, vegetables appear richer in color, and the greens take on a deep, lush tone. At the same time, the consumer will be impressed by your fresh, clean display. In turn, you will be impressed with the increase in sales due to the appearance of your products under the Market Lite Plus.


Market Lite Plus
(more red
light output)

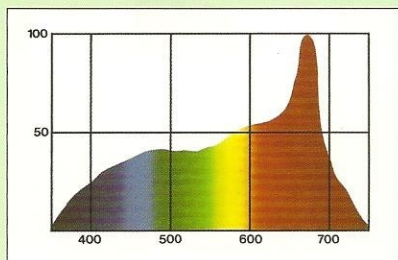

Warm White

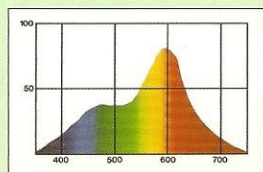

Cool White

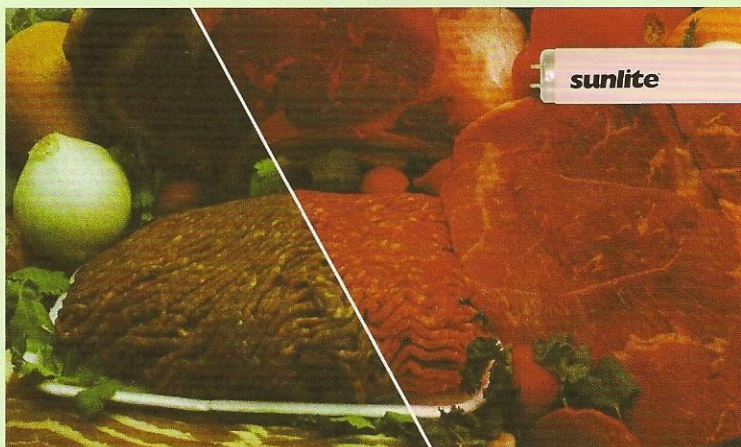

T8 >>

Item #	Description	Base	Watts	Color	Lumens	CRI	Hours	Length	Pkg.
30701	F15T8/ML+	T8 Bi-Pin	15	Red	445	77	7,500	18.00	30
30700	F25T8/ML+	T8 Bi-Pin	25	Red	N/A	77	7,500	36.00	30
30702	F30T8/ML+	T8 Bi-Pin	30	Red	1880	77	7,500	36.00	30
30705	F32T8/ML+	T8 Bi-Pin	32	Red	1425	77	20,000	48.00	30
30710	F40T8/ML+	T8 Bi-Pin	40	Red	1600	77	20,000	60.00	30


T12 >>

Item #	Description	Base	Watts	Color	Lumens	CRI	Hours	Length	Pkg.
30715	F20T12/ML+	T12 Bi-Pin	20	Red	600	77	9,000	20.00	30
30720	F30T12/ML+	T12 Bi-Pin	30	Red	1175	77	18,000	36.00	30
30725	F40T12/ML+	T12 Bi-Pin	40	Red	1600	77	20,000	48.00	30
30730	F48T12/ML+	T12 Single	39	Red	1550	77	9,000	46.00	30
30735	F48T12/ML+/HO	T12 RDC	60	Red	2200	77	12,000	46.00	30
30740	F60T12/ML+	T12 Single	50	Red	1850	77	12,000	60.00	16
30745	F60T12/ML+/HO	T12 RDC	75	Red	2750	77	12,000	60.00	15
30750	F72T12/ML+	T12 Single	55	Red	2400	77	12,000	72.00	15
30755	F72T12/ML+/HO	T12 RDC	85	Red	3400	77	12,000	72.00	15
30760	F96T12/ML+	T12 Single	75	Red	3300	77	12,000	96.00	15
30765	F96T12/ML+/HO	T12 RDC	110	Red	4700	77	12,000	96.00	15

TUBEGUARDS

Clear & Colored Tubeguards

FLUORESCENT



Clear




Amber



Blue



Red



Pink



Green

Item #	Description	Description2	Length	Pkg.
05101	END/T12	End Caps for T12 Tubeguard	N/A	24
05102	END/T8	End Caps for T8 Tubeguard	N/A	24
05105	F28T5/TUBEGUARD/CL	T5 Clear	48.00	24
05106	F28-54T5/TUBEGUARD/B	T5 Blue	48.00	24
05120	FO32/TUBEGUARD/UVA	T8 Uva Clear	48.00	24
05196	F25T8/TUBEGUARD/CL	T8 Clear	36.00	24
05127	F40T8/TUBEGUARD/CL	T8 Clear	60.00	24
05107	F30T8/TUBEGUARD/CL	T8 Clear	36.00	24
05128	F32T8/TUBEGUARD/PR	T8 Purple	48.00	24
05121	F32T8TUBEGUARD/CL/MATRIX	T8 Matrix Clear	48.00	24
05122	F32T8/TUBEGUARD/A	T8 Amber	48.00	24
05123	F32T8/TUBEGUARD/B	T8 Blue	48.00	24
05124	F32T8/TUBEGUARD/G	T8 Green	48.00	24
05125	F32T8/TUBEGUARD/P	T8 Pink	48.00	24
05126	F32T8/TUBEGUARD/R	T8 Red	48.00	24
05190	F32T8/TUBEGUARD/CL	T8 Clear	48.00	24
05194	F96T8/TUBEGUARD/CL	T8 Clear	96.00	24
05154	F96T8/TUBEGUARD/R	T8 Red	96.00	24
05111	F30T12/TUBEGUARD/CL	T12 Clear	36.00	24
05192	F40T12/TUBEGUARD/CL/MATRIX	T12 Matrix Clear	48.00	24
05185	F40T12/TUBEGUARD/CL	T12 Clear	48.00	24
05186	F40T12/TUBEGUARD/A	T12 Amber	48.00	24
05187	F40T12/TUBEGUARD/B	T12 Blue	48.00	24
05188	F40T12/TUBEGUARD/G	T12 Green	48.00	24
05189	F40T12/TUBEGUARD/P	T12 Pink	48.00	24
05191	F40T12/TUBEGUARD/R	T12 Red	48.00	24
05193	F72T12/TUBEGUARD/CL	T12 Clear	72.00	24
05151	F96T12/TUBEGUARD/B	T12 Blue	96.00	24
05152	F96T12/TUBEGUARD/G	T12 Green	96.00	24
05153	F96T12/TUBEGUARD/R	T12 Red	96.00	24
05197	F96T12/TUBEGUARD/Y	T12 Yellow	96.00	24
05156	F96T12/TUBEGUARD/P	T12 Pink	96.00	24
05195	F96T12/TUBEGUARD/CL	T12 Clear	96.00	24
05196	F96T12/TUBEGUARD/A	T12 Amber	96.00	24



SMS



SMSF



SM



SL




SL/High Watt




SLC




SLM




SLG




SLB




SLJ



SLS




PLD




PLT




FUL




PL




FDL




PAR38




SLR




FCA



Circline 4-Pin
T9



Circline 4-Pin
T5



FT



T12
(1-1/2" diameter)



T8
(1" diameter)



T5
(5/8" diameter)



T8 U-Shaped
(1" diameter)



T12 U-Shaped
(1-1/2" diameter)




T8 U-Shaped
(1" diameter)


BASE DIRECTORY

CFLs & Straight Tubes


FLUORESCENT



G23




GX23




G 23 2



GX 23-2




G 24d-2




G 24 q-1




G24q-3




GX32d-3




GX32d-2




GX 24 d-2




GX 24 d-3




GX 24 q-1




GX 24 q-2




GX 24 q-3




GX 24 q-4



2 G 11




2 G 7




2 GX 7




2G 10
DELUX



4-Pin for T9
Circline



4-Pin for T5
Circline



Octron T8 &
T12



Mini Bipin



Medium
Bipin for T8



Medium
Bipin for T12



Medium
Base

**SINGLE TUBE
2-PIN**

Sunlite	GE	Sylvania	Philips
PL5/SP27K	F5BX/SPX27	CF5DS/827	PL-S5W/827
PL5/SP41K	F5BX/SPX41	CF5DS/841	PL-S5W/841
PL7/SP27K	F7BX/SPX27	CF7DS/827	PL-S7W/827
PL7/SP41K	F7BX/SPX41	CF7DS/841	PL-S7W/841
PL9/SP27K	F9BX/SPX27	CF9DS/827	PL-S9W/827
PL9/SP30K			
PL9/SP35K	F9BX/SPX35	CF9DS/835	PL-S9W/835
PL9/SP41K	F9BX/SPX41	CF9DS/841	PL-S9W/841
PL13/SP27K	F13BX/SPX27	CF13DS/827	PL-S13W/827
PL13/SP30K			
PL13/SP35K	F13BX/SPX35	CF13DS/835	PL-S13W/835
PL13/SP41K	F13BX/SPX41	CF13DS/841	PL-S13W/841
PL13/SP50K			PL-S13W/850

**DOUBLE TUBE
2-PIN**

Sunlite	GE	Sylvania	Philips
PLD13/27K	F13DBX/SPX27	CF13DD/827	PL-C13W/827
PLD13/30K			
PLD13/35K	F13DBX/SPX35	CF13DD/835	PL-C13W/835
PLD13/41K	F13DBX/SPX41	CF13DD/841	PL-C13W/841
PLD18/27K	F18DBX/SPX27	CF18DD/827	PL-C18W/827
PLD18/30K			
PLD18/35K	F18DBX/SPX35	CF18DD/835	PL-C18W/835
PLD18/41K	F18DBX/SPX41	CF18DD/841	PL-C18W/841
PLD26/27K	F26DBX/SPX27	CF26DD/827	PL-C26W/827
PLD26/35K	F26DBX/SPX35	CF26DD/835	PL-C26W/835
PLD26/30K			
PLD26/41K	F26DBX/SPX41	CF26DD/841	PL-C26W/841

**DOUBLE TUBE
4-PIN**

Sunlite	GE	Sylvania	Philips
PLD13E/SP27K	F13DBX/SPX27/4P	CF13DD/E/827	PL-C13W/827/4P
PLD13E/SP35K	F13DBX/SPX35/4P	CF13DD/E/835	PL-C13W/835/4P
PLD13E/SP41K	F13DBX/SPX41/4P	CF13DD/E/841	PL-C13W/841/4P
PLD18E/SP27K	F18DBX/SPX27/4P	CF18DD/E/827	PL-C18W/827/4P
PLD18E/SP35K	F18DBX/SPX35/4P	CF18DD/E/835	PL-C18W/835/4P
PLD18E/SP41K	F18DBX/SPX41/4P	CF18DD/E/841	PL-C18W/841/4P
PLD26E/SP27K	F26DBX/SPX27/4P	CF26DD/E/827	PL-C26W/827/4P
PLD26E/SP35K	F26DBX/SPX35/4P	CF26DD/E/835	PL-C26W/835/4P
PLD26E/SP41K	F26DBX/SPX41/4P	CF26DD/E/841	PL-C26W/841/4P

**4-PIN
LONG**

Sunlite	GE	Sylvania	Philips
FT36DL/830	F36/39BX/SPX30/RS	FT36DL/830	PL-L36W/830
FT36DL/835	F36/39BX/SPX35/RS	FT36DL/835	PL-L36W/835
FT36DL/841	F36/39BX/SPX41/RS	FT36DL/841	PL-L36W/841
FT40DL/830/RS	F40/30BX/SPX30	FT40DL/830/RS	PL-L40W/830/RS/IS
FT40DL/835/RS	F40/30BX/SPX35	FT40DL/835/RS	PL-L40W/835/RS/IS
FT40DL/841/RS	F40/30BX/SPX41	FT40DL/841/RS	PL-L40W/841/RS/IS
FT55DL/830	F55BX/830	FT55DL/830	PL-L50W/30RS
FT55DL/835	F55BX/835	FT55DL/835	PL-L50W/35RS
FT55DL/841	F55BX/841	FT55DL/841	PL-L50W/41RS

**PLT18 >>>
PLT26**

Sunlite	GE	Sylvania	Philips
PLT18/E/SP27K	F18TBX/SPX27/A/4P/EOL	CF18DT/E/IN/827	PL-T 18W/827/4P/ALTO
PLT18/E/SP30K	F18TBX/SPX30/A/4P/EOL	CF18DT/E/IN/830	PL-T18W/830/4P/ALTO
PLT18/E/SP35K	F18TBX/SPX35/A/4P/EOL	CF18DT/E/IN/835	PL-T18W/835/4P/ALTO
PLT18/E/SP41K	F18TBX/SPX41/A/4P/EOL	CF18DT/E/IN/841	PL-T18W/841/4P/ALTO
PLT26/E/SP27K	F26TBX/SPX27/A/4P/EOL	CF26DT/E/IN/827	PL-T26W/827/4P/ALTO
PLT26/E/SP30K	F26TBX/SPX30/A/4P/EOL	CF26DT/E/IN/830	PL-T26W/830/4P/ALTO
PLT26/E/SP35K	F26TBX/SPX35/A/4P/EOL	CF26DT/E/IN/835	PL-T26W/835/4P/ALTO
PLT26/E/SP41K	F26TBX/SPX41/A/4P/EOL	CF26DT/E/IN/841	PL-T26W/841/4P/ALTO

**T8 >>>
TUBES**

Sunlite	GE	Sylvania	Philips
F17T8/SP730	F17T8/SP30	FO17/730	F17T8/TL730
F17T8/SP735	F17T8/SP35	FO17/735	F17T8/TL735
F17T8/SP741	F17T8/SP41	FO17/741	F17T8/TL741
F25T8/SP730	F25T8/SP30	FO25/730	F25T8/TL730
F25T8/SP735	F25T8/SP35	FO25/735	F25T8/TL735
F32T8/SP730	F32T8/SP30	FO32/730	F32T8/TL730
F32T8/SP735	F32T8/SP35	FO32/735	F32T8/TL735
F32T8/SP741	F32T8/SP41	FO32/741	F32T8/TL741
F32T8/SP750	F32T8/SP50/ECO	FO32/750	F32T8/TL750/ALTO
F32T8/SP765	F32T8/SP65/ECO	FO32/765	F32T8/TL765/ALTO
F17T8/SP830	F17T8/SPX30/ECO	FO17/830	F17T8/TL830
F17T8/SP835	F17T8/SPX35/ECO	FO17/835	F17T8/TL835
F17T8/SP841	F17T8/SPX41/ECO	FO17/841	F17T8/TL841
F25T8/SP830	F25T8/SPX30/ECO	FO25/830	F25T8/TL830
F25T8/SP835	F25T8/SPX35/ECO	FO25/835	F25T8/TL835
F25T8/SP841	F25T8/SPX41/ECO	FO25/841	F25T8/TL841
F32T8/SP830	F32T8/SPX30/ECO	FO32/830	F32T8/TL830
F32T8/SP835	F32T8/SPX35/ECO	FO32/835	F32T8/TL835
F32T8/SP841	F32T8/SPX41/ECO	FO32/841	F32T8/TL841

**FB31 >>>
FB32**

Sunlite	GE	Sylvania	Philips
FB32/SP730/6	F32T8/SP30/U/6	FBO32/730/6	FB32T8/TL730/U/6
FB32/SP735/6	F32T8/SP35/U/6	FBO32/735/6	FB32T8/TL735/U/6
FB32/SP741/6	F32T8/SP41/U/6	FBO32/741/6	FB32T8/TL741/U/6
FB32/SP750/6	F32T8/SP50/U/6	FBO32/750/6	FB32T8/TL750/U/6
FB32/SP765/6	F32T8/SP65/U/6	FBO32/765/6	FB32T8/TL765/U/6
FB32/SP830/6	F32T8/SPX30/U/6	FBO32/830/6	FB32T8/TL830/U/6
FB32/SP835/6	F32T8/SPX35/U/6	FBO32/835/6	FB32T8/TL835/U/6
FB32/SP841/6	F32T8/SPX41/U/6	FBO32/841/6	FB32T8/TL841/U/6
FB32/SP850/6	F32T8/SPX50/U/6	FBO32/850/6	FB32T8/TL850/U/6
FB32/SP865/6	F32T8/SPX65/U/6	FBO32/865/6	FB32T8/TL865/U/6
FB31/SP830	F31T8/SPX30/U	FBO31/830	
FB31/SP835	F31T8/SPX35/U	FBO31/835	
FB31/SP841	F31T8/SPX41/U	FBO31/841	